



**NIPPON
PAINT**

ATOM
2-in-1 PRIMER
FOR INTERIOR AND EXTERIOR



Nippon Paint Atom 2-in-1 Primer is suitable for both Interior as well as exterior, it provide good adhesion to concrete substrate and value for money.

GREEN ASSURED



PRODUCT FEATURES



Low VOC

Environment friendly and Healthy paint



Good Adhesion

This makes the interior cooler, thus helping to save energy used for airconditioning.



Good Opacity

Better coverage at economic cost



2-in-1 Primer

TECHNICAL DETAILS

Colour Range	: White
Finish	: Matt
Dry Time	: To Touch: 30 minutes To Recoat: 4-6 hours
Clean up solvent	: Clean, potable water
Stability of diluted paint	: 24 Hours
Shelf life	: 3 Years from the date of manufacture in original tightly closed containers .Higher temperature during storage may reduce the shelf life and may lead to gelling in the container.
Dilution	: Upto 100% by volume with clean, potable water for exteriors and Upto 50% by volume with clean, potable water for interiors. Stir & strain well before use.



Where To use: Can be used on interior & Exterior walls, ceilings and hard & soft boards.



NIPPON PAINT

ATOM 2-in-1 PRIMER

FOR INTERIOR AND EXTERIOR

HOW TO APPLY

Surface Preparation:

For Interior: Clean the surface till it is free from dust, grease and any flaking paint from surface. Apply Nippon Paint Atom 2-in-1 primer allow to dry for 4-6 hrs. Apply Nippon Acrylic Wall putty for smoothening out dents. Allow to dry putty thoroughly apply one more coat of Nippon Paint Atom 2-in-1 Primer on puttied surfacea Allow painted surface to dry for 4-6hrs. before applying top coat.

For Exterior for repainting: Clean the surface till it is free from dust, grease and any flaking paint from surface. Any unstable paint to be removed, using high pressure wash or scraper whichever is appropriate. Algae and Fungus on the wall to be removed, by using high pressure wash or coir brush and shall be treated with Walltron Kleanwall fungicidal solution.

New Plaster: Ensure that surface is completely cured and dry. Application of cement paint/white cement/lime as an undercoat is not recommended.

Coverage:




ATOM 2-IN-1 PRIMER

Interior:
180 - 200 sq.ft/litre/coat
Exterior:
100 - 110 sq.ft/litre/coat

(Actual coverage is dependant on the substrate condition, surface porosity, method of application).

Process:

Recommended Painting System: Interior

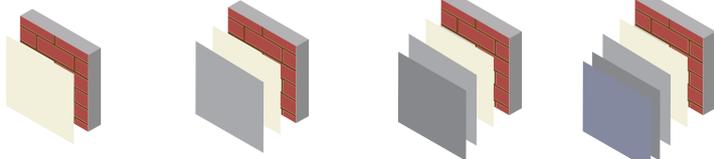

Primer

Nippon Paint
Atom 2-in-1 Primer

Apply 1 coats

Allow it to dry
for 4-5 hours

Putty

Nippon Paint
Acrylic Wall Putty

Apply 1-2 coats

Allow it to dry
overnight

Primer

Nippon Paint
Atom 2-in-1 Primer

Apply 1 coats

Allow it to dry
for 4-5 hours


Top Coat

Nippon Paint
Interior Emulsion Paint

Apply 2-3 coats

Allow it to dry
for 4-6 hours

Recommended Painting System: Exterior



Primer

Nippon Paint
Atom 2-in-1 Primer

Apply 1 coats

Allow it to dry
for 4-5 hours

Top Coat

Nippon Paint
Exterior Topcoats

Apply 2-3 coats

Allow it to dry
for 4-6 hours

Application:

Brush : Dilute with water upto 50% for interior use and upto 100% for exterior use
Roller : Dilute with water upto 50% for interior use and upto 100% for exterior use
Conventional Spray : Dilute with water upto 50%

SAFETY AND ENVIRONMENT

During Painting:

Always work in a well ventilated area. Wear appropriate attire, especially gloves and eye protection gear. Avoid contact with skin as it may cause irritation.

Cleaning:

Wash all the tools with water immediately after application.

Safety Instructions:

In the case of eye contact, rinse immediately with water and seek immediate medical treatment. To remove paint for skin, use soap and water or appropriate cleanser. In the event of spillage, contain and collect spilt paint by using sand or earth.

Precautions:

Avoid painting when the temperature is below 10 degrees Celsius. Painting is not recommended if the moisture content and alkalinity of the walls is high. Moisture content of the walls should be below 16% (measured by Protimeter) and alkalinity of the wall should be below pH-9. Relative humidity should be below 85%. Painting on a newly plastered wall is recommended after 12 weeks of curing.

Note: Do not keep unpainted for more than 15 days

Storage:

Store paint in a cool, dry and well ventilated place away from heat sources, flammables or direct sunlight. Keep container tightly closed in a secure, upright position. Do not store near food, drink or animal feed. Keep out of reach of children. Do not dispose of unwanted paint into drains, water sources or open sewers. To dispose safely, pour unwanted paint onto old newspapers and let dry before placing in a proper waste receptacle

Disposal Information:

Disposal of any paint waste & containers in accordance with applicable Environment (Protection) Act 1986 under the Hazardous Wastes (Management & Handling) rules 1989.

Environment:

Does not contain any added lead, mercury or chromium compounds.
Lead content does not exceed 90 parts per million.

