



LOOKING BEYOND

Every day brings change. New ideas, technology & perspectives are constantly challenging the status quo and broadening our horizons. Society is recognising the unlimited potential, beauty and capacity for thought in each of us, no matter how we are wired.

It's a happy, inclusive world that we're creating, where the uniqueness of every individual is celebrated. Nippon Paint is proud to be part of this change and brings you a range of colours inspired by young artists on the spectrum.

Presenting



Colours for Change

An enriching, soul-stirring foray into colours.





THE COLOURS FOR CHANGE INITIATIVE

Colours for Change is an ongoing and far reaching initiative by Nippon Paint to create a platform to recognise the rich talent of children on the spectrum of learning disabilities, mental and physical challenges. We started by reaching out to 29 institutions in Chennai, Coimbatore, Madurai, Trichy, Tirunelveli & Salem (Tamil Nadu) and Bangalore, Mangalore & Hubli (Karnataka). It was a free flowing exercise and the children were asked to express their thoughts and ideas on canvas, using any art material they preferred.

The response from our young artists was simply overwhelming. Colours for Change received over 650 artworks from Tamil Nadu and 356 from Karnataka, making it a grand total of 1006 artworks.

Over 50 drawings were selected for their style, imagery and colour by panelists, people well known in the field of art & design. These paintings will feature as originals across various media for brand like our annual diary, calendar and this style guide.

We are inordinately proud of these artists and think it a privilege to share their expressions and vision.

Our Team:

William Sacheli - CEO of Caribean
(A Design Initiative)
Sharon Appadoo - Gallery
Ravi K Chandraan - Designographer
Taku Oishi - Art Director and 3d Designer
Ravi - Emmy Award Winning Art Director

BASIC GUIDE TO CHOOSING THE RIGHT COLOURS

Although there are no hard and fast rules, there are certain colour combinations that are more appealing. Use the colour wheel to select an inspiration colour scheme that will look great in your home!



- P PRIMARY COLOUR**
red, blue, yellow
- S SECONDARY COLOUR**
cyan, green, magenta
- T TERTIARY COLOUR**
blue-green, blue-violet, red-violet, red-orange, yellow-orange, yellow-green

 colour + black
  colour
  colour + grey
  colour + white



MONOCHROMATIC

Choose any shade, tint, or tone of one colour, for example yellow-greens, to create a simple colour scheme based on the lighter or darker variations of yellow-greens. You could also add neutral colours such as white and grey for extra visual interest.

ADJACENT

Mix either a primary or secondary colour with one or two tertiary colours. Choose two or three colours lying next to each other on the colour wheel, within a 90-degree angle. For example, combine reds with red-oranges and oranges.



COMPLEMENTARY

Choose two colours that lie opposite each other on the colour wheel - such as purple and yellow - as the main colours in your colour scheme. The result could be a vivid combination, full of energy, depending on the strength of the colour chosen.

TRIADIC

Use three colours that are equidistant on the colour wheel, such as oranges, greens and violets. For best results, you should use one dominant colour and use the other two as subtle complementing colours.



JORDAN PREETHAM
Manna - Developmental Disability Center
Bangalore

LIMITLESS WHITE

Truly great artists know the power of white. The base of all colours, neutral yet intriguing, and endlessly imaginative.

Hints of white can bring out the richness of other tones, capture the beauty of light or create a cocoon of calm.

Our whites are versatile and celebrate simplicity, clean lines and add a touch of elegance wherever they're used.










THE CALL OF YELLOW


Yellow is a magical colour. Paint it into a minimalist outline or layer it into complex tones, yellow brings positivity, brightness and cheer to any creation. The shade of the sun, yellows transform any space.

Au range of happy yellows create joyful centers, collages, rooms and art projects or vibrant to your home.

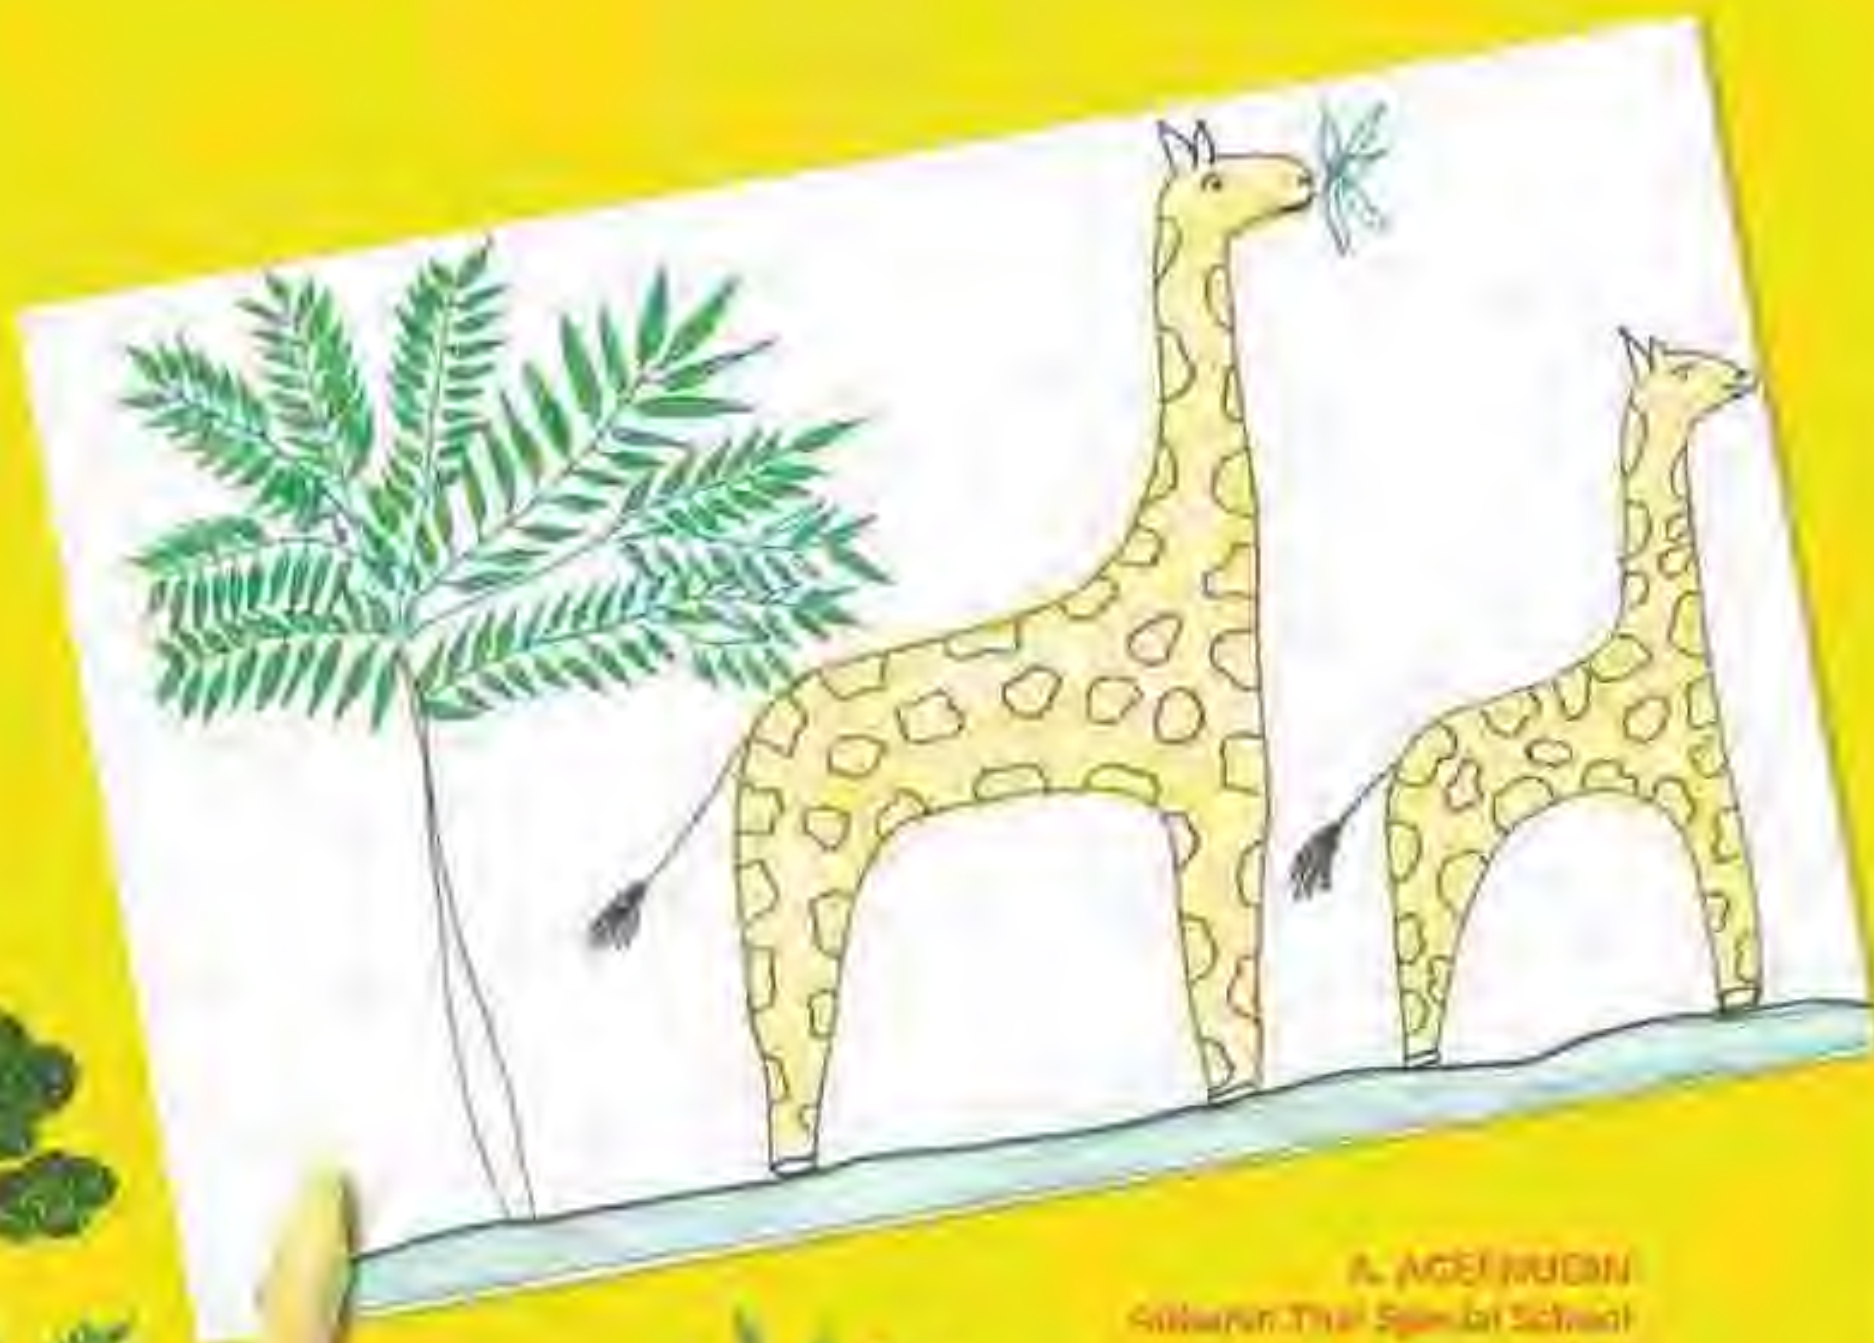

A. NGEL MUDAN
Colourful Thai Special School
Babes



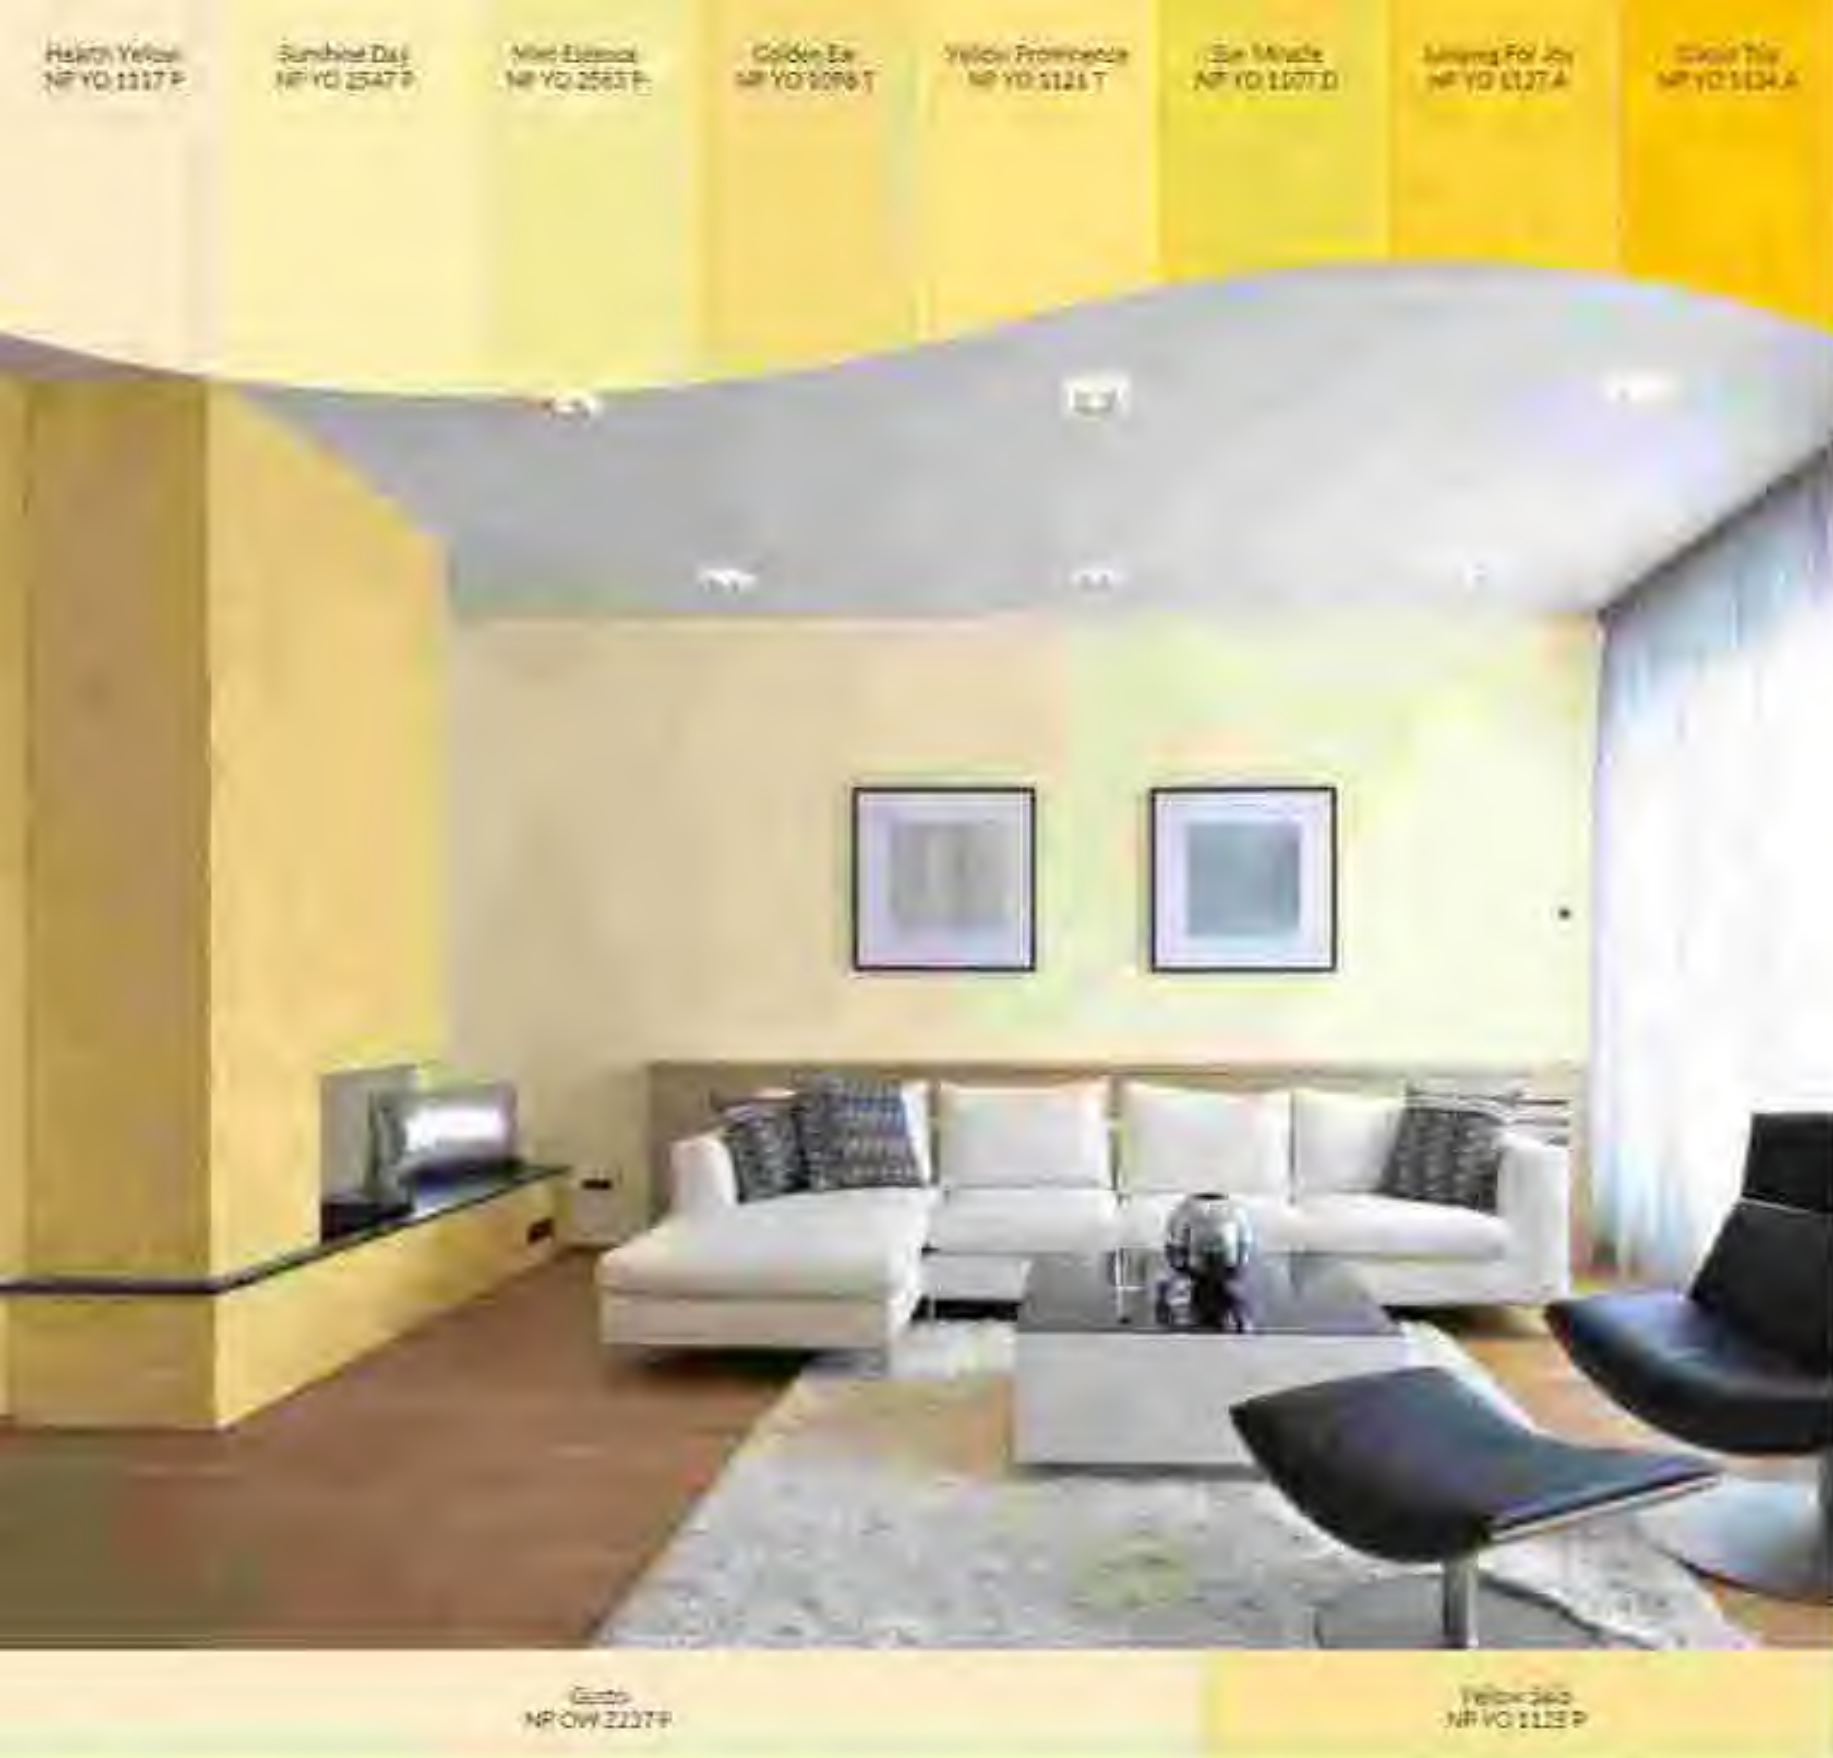







ARSHAQ ZEBADIYAD
Aarambh Foundation
Bangalore

ZING WITH RED

Red is liberating, powerful and commands your attention. Legendary paintings are often those that have made statements in red.

Red is all about a new perspective, doing away with the usual & ordinary. A streak of red infuses pulsating energy that stays with you.

Hinson Paint's reds harness this vitality and paint excitement and luxury onto everything they touch.

www.elsevier.com/locate/jmb



NP CW 1060 #

100

1946
NIP 0.3267 A



NY 101201 F

Gender
No. 2 (1993)











C.K. RUBAN
The Dolphin Special School
Trichy



UNIQUELY PINK

Each eye has its own interpretation of pink. A subtle shade, it invites everything from floral notes to celebration to leisure to well-being.

Pink holds its own place, mixing yet standing out; adding lightness & softness wherever it is brushed in.

Embellish your home with our family of pinks: to capture a feeling like none other.










P.N. HARSHI PANDIAN
Jayne Special School
Madurai

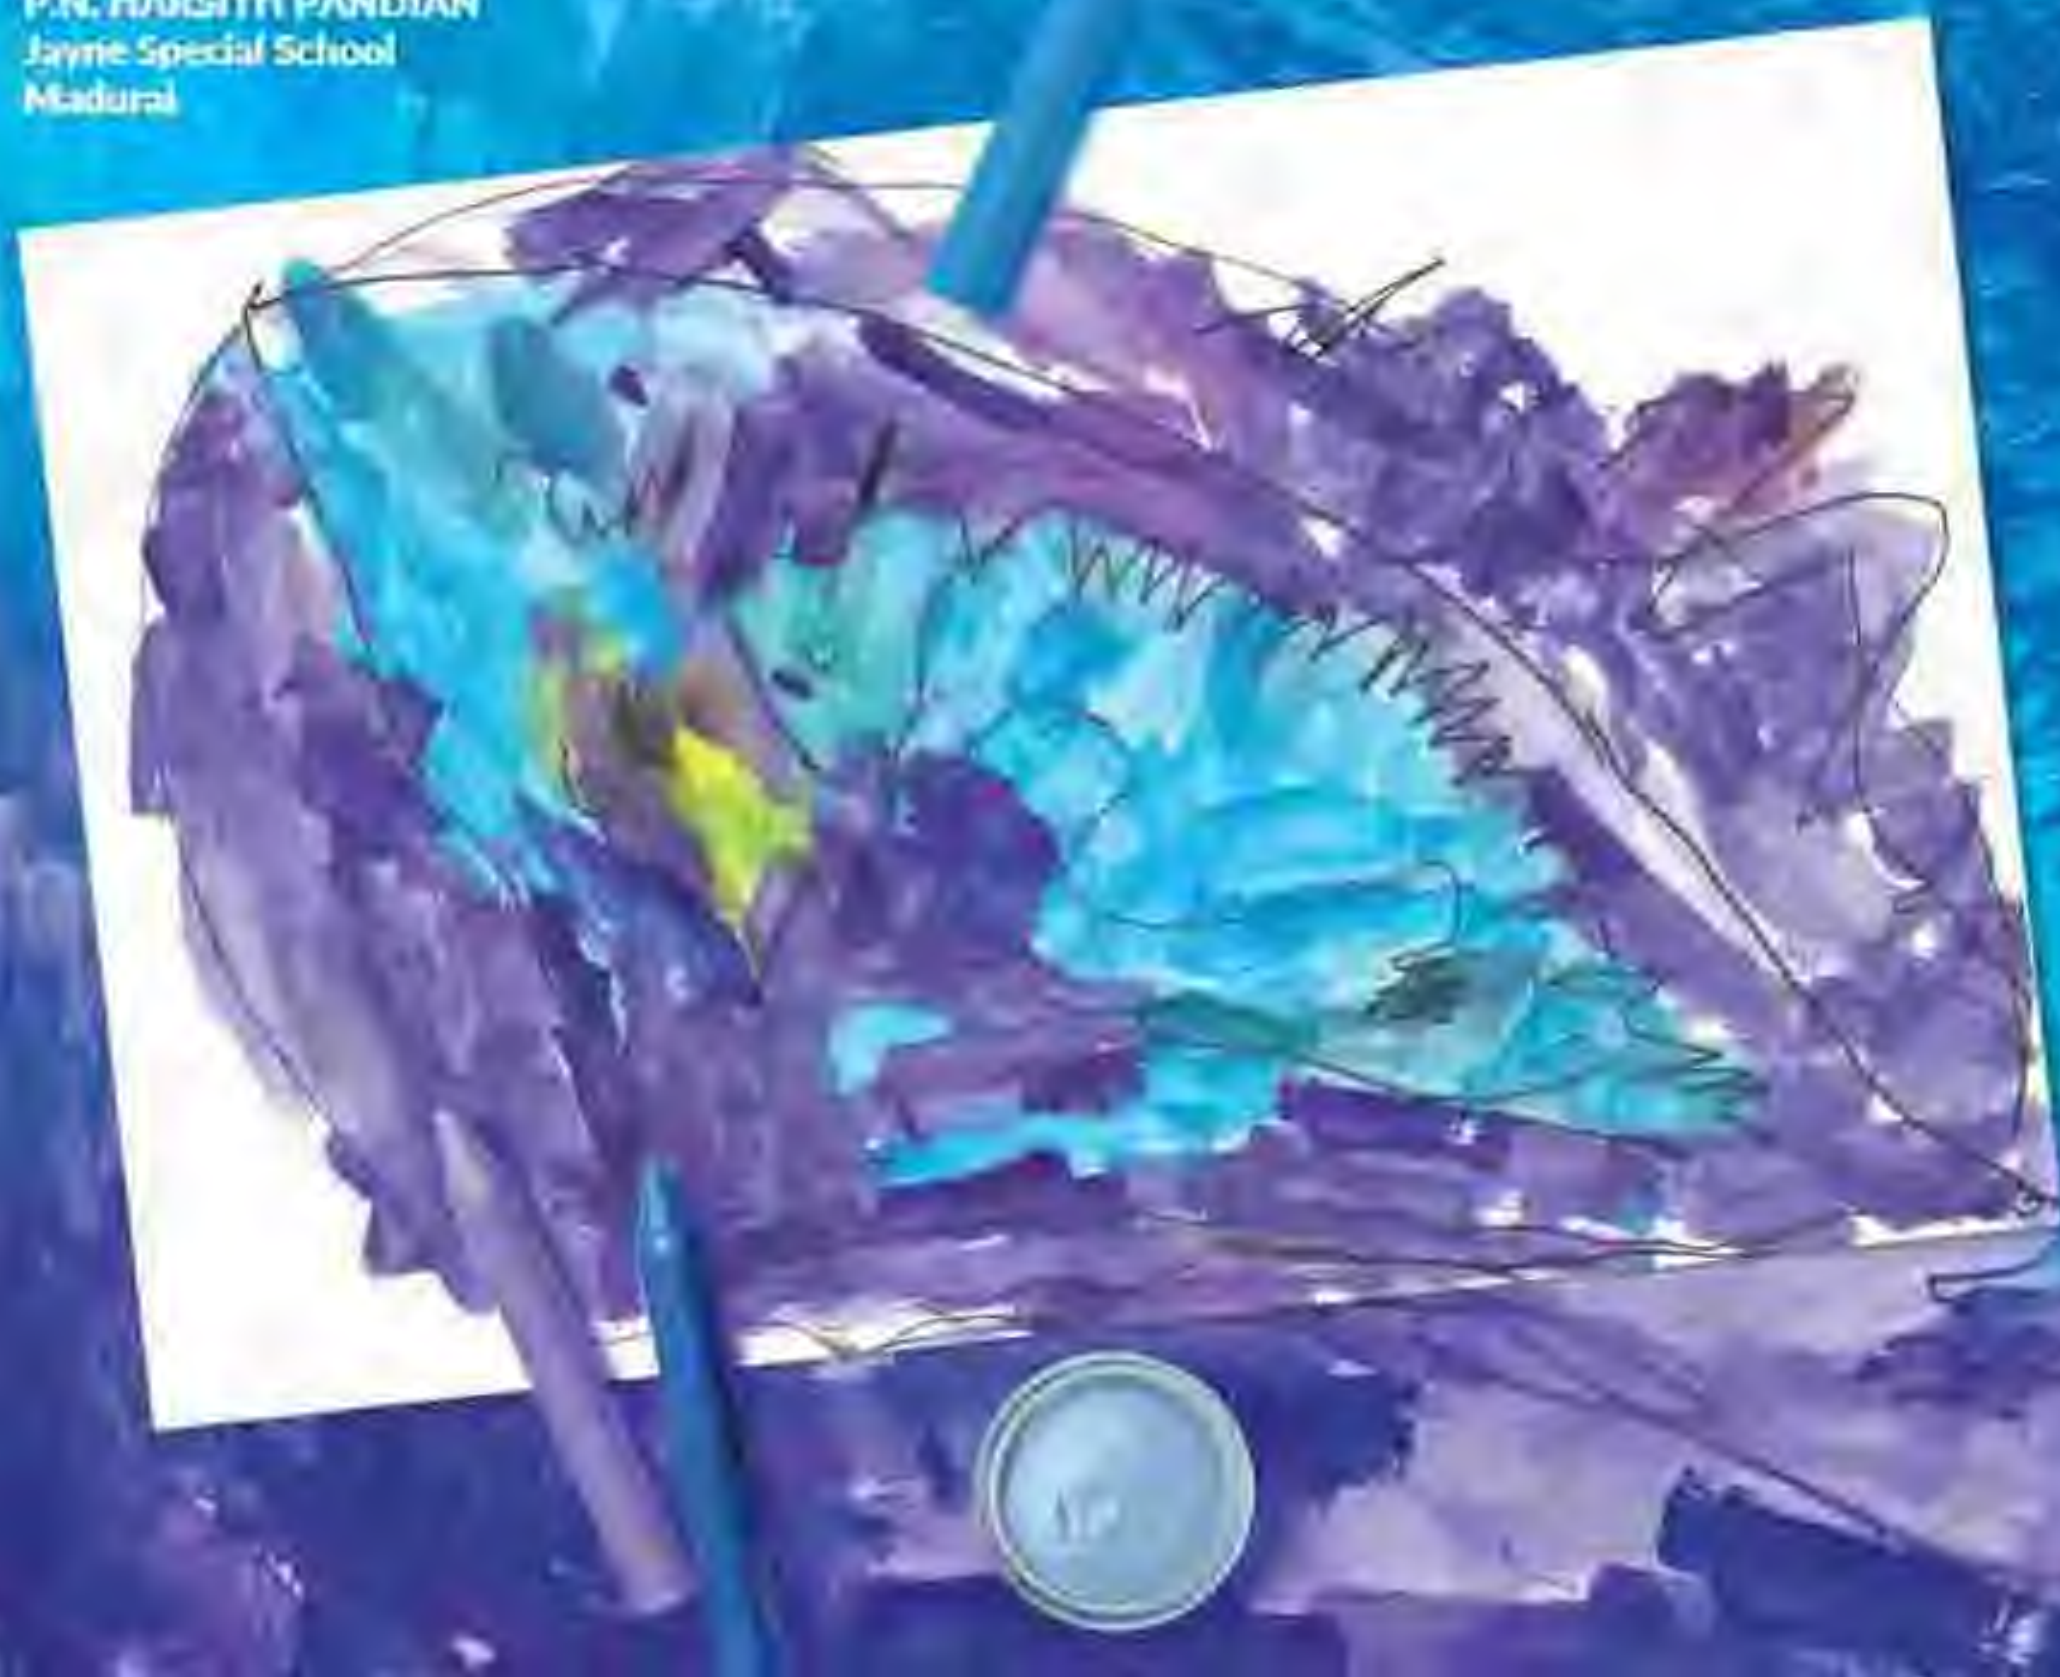

BLUE PRISMS

From ocean to sky, blue is all around us. Cool and light at one end, intense and mysterious at the other, blues hold crannies of meanings and possibilities in them.

A combination of blues is a masterpiece in itself, allowing artists to create subtle layers of tone and meaning.

Reward yourself with a multiverse of blue, for spaces that reflect every aspect of you.











R. RISHI RAJ
Murthizaviya
School for the
Mentally Retarded
Chennai



LUSH GREENS

Humanity links with green at a subconscious level. The favourite shade of mother nature, greens symbolize freshness, abundance and birth.

Greens are favourites of creators to etch and evoke verdant forests, mythical elven worlds and enchanting glades.

These nuances have led us to offer you an expansive range of greens that bring the same richness to your home, for every wall and every floor.

Woods, Fred
San Antonio, TX









REAL BROWN

Brown is all about centring, bringing your focus to what's real & important. The colour of the Earth, browns imbue solidity and timelessness.

The wisest artists use Brown to contrast other shades and allow for a vivid interplay of colours, for creations that hum with both serenity and spirit.

Our must-have browns help you go wild with colours, to create a palette unlike any other.



V. NATARAJAN
Pushpalata Mitra School for Autism
Tirunelveli









Get House
NP N 1202 F

Green House
NP N 1202 D

Gold House
NP N 1201 A



Green House
NP N 1202 D

Gold House
NP N 1201 A

Painted House
NP N 1204 A



Home Sweet Home
NP N 1201 F

Red House
NP N 1202 D

Tricolor House
NP N 1207 A



Green House
NP N 1202 D

Gold House
NP N 1201 A

Painted House
NP N 1204 A



Green House
NP N 1202 D

Gold House
NP N 1201 A

Painted House
NP N 1204 A



Green House
NP N 1202 D

Gold House
NP N 1201 A

Painted House
NP N 1204 A



Green House
NP N 1202 D

Gold House
NP N 1201 A

Painted House
NP N 1204 A



Green House
NP N 1202 D

Gold House
NP N 1201 A

Painted House
NP N 1204 A

J. JEFFRY
Ayur Sukham Special School
Chennai

NIPPON TECH IN TUNE WITH TOMORROW

As with art, we are always thinking of the future and how we will be viewed. Our mascots the blobbies, while endearing, also symbolize our commitment to clean, futuristic tech. Their use of hovercrafts, 3D shields and ultra-performance vacuums, is a nod to the innovative mindset that is part of Nippon Paint's DNA.

The processes & thinking behind our cutting-edge products are way ahead of the curve. And they are green too! For instance, the Nippon Paint plant in Chennai is the first factory in India to achieve Green Pro and Green Co certifications.

Our paint innovations like Silicone Lamination Technology are aimed at protecting homes from extreme weather conditions. In interiors, the revolutionary Aircare VG contains Active Carbon Technology which converts formaldehyde into water vapour, thereby purifying the air. The same product range also has anti-bacterial properties and Silver Ion Technology which makes the paint safer and homes healthier for families.




INTERIOR COLOUR GROUPS

OFF WHITES



YELLOWS & ORANGES

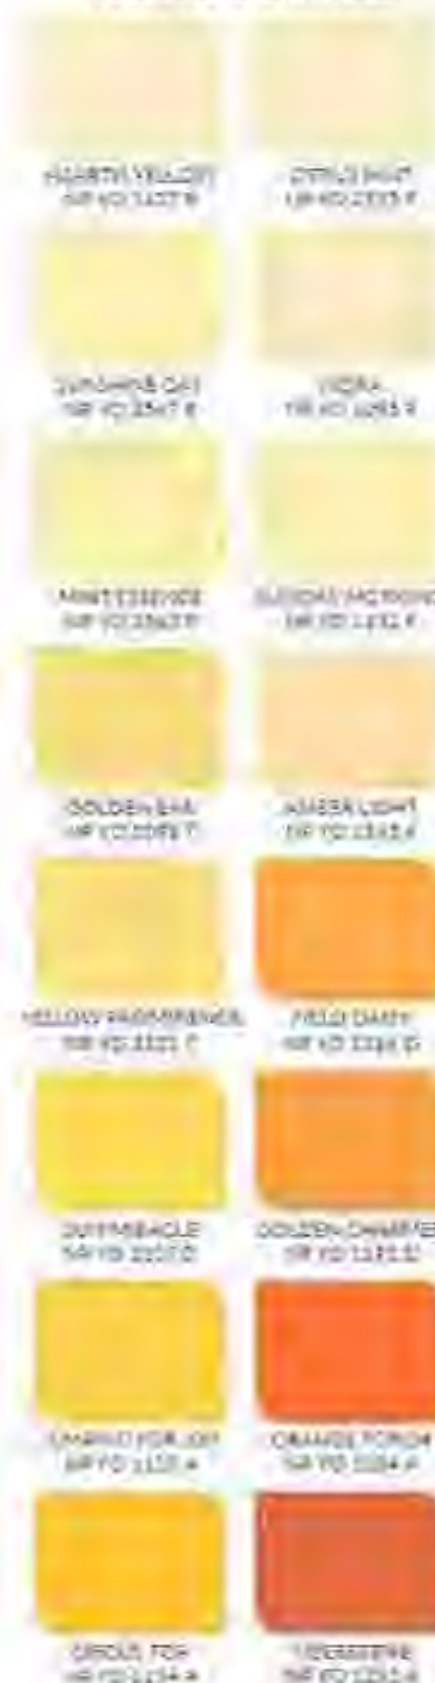

PEACHES & REDS



PINKS & PURPLES



PINKS & PURPLES



BLUES & BLUE GREENS



GREENS & YELLOW GREENS



NEUTRALS & GREYS



EXTERIOR COLOUR GROUPS

OFF WHITES

YELLOWS & ORANGES

REDS & PEACHES

PINKS & PURPLES

PINKS & PURPLES

BLUES & BLUE GREENS

GREENS & YELLOW GREENS

NEUTRALS & GREYS

EVERGREEN WHITE NP 100A-2200 F	SWISS WHITE NP 100A-1400 F
PEARL NP 100A-2200 F	SNOW WHITE NP 100A-2200 F
WHITE BONE NP 100A-2200 F	WHITE STONE NP 100A-2200 F
CHOC FLAME NP 100A-2200 F	CREAM WHITE NP 100A-2200 F
FLAME FLAME NP 100A-2200 F	SOFT ALP NP 100A-2200 F
ROSE BUD NP 100A-2200 F	BLANK SLATE NP 100A-2200 F
SWEET WEAVER NP 100A-2200 F	SWISS WHITE NP 100A-2200 F
TRICIA BLUE NP 100A-2200 F	GREEN RACE NP 100A-2200 F

HEALTHY YELLOW NP 100A-2200 F	BLISSFUL NP 100A-2200 F
AMBER MORNING NP 100A-2200 F	HAPPY GO ROUND NP 100A-2200 F
YELLOW DALL NP 100A-2200 F	WHEAT COAT NP 100A-2200 F
LEMON CHIFFON NP 100A-2200 F	OLD SINGER NP 100A-2200 F
SUN MARBLE NP 100A-2200 F	HYACINTH NP 100A-2200 F
YELLOW BIRD NP 100A-2200 F	GOLDEN CHAMPION NP 100A-2200 F
LAUREL FOR NP 100A-2200 F	ORANGE BONE NP 100A-2200 F
ORANGE BONE NP 100A-2200 F	ORANGE BONE NP 100A-2200 F

WARM BEAM NP 100A-2200 F	ORANGE BONE NP 100A-2200 F
BEAUTY FAULT NP 100A-2200 F	WARM BONE NP 100A-2200 F
INFANT SMILE NP 100A-2200 F	FLOWER BONE NP 100A-2200 F
ORANGE MACARON NP 100A-2200 F	STRAWBERRY ICE NP 100A-2200 F
ROSEAL NP 100A-2200 F	WIND BONE NP 100A-2200 F
LAUREL FOR NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F

BLISSFUL NP 100A-2200 F
SWEETHEART NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F

SWEET DEAL NP 100A-2200 F
WARM BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F

PROUD ICE NP 100A-2200 F	ORANGE BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F

WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F

WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F
WIND BONE NP 100A-2200 F	WIND BONE NP 100A-2200 F

SPECIAL MENTION

SUJITH
Aarambh Foundation, Bangalore

KEERTHANA
Aarambh Foundation, Bangalore

C MARI SELVI
Bishop Sargent School for the Intellectually
Disabled Children, Tirunelveli

ARGAN MELONEY D
Mitra School for Autism, Palayamkottai

SKANDA
Arivu Early Intervention Center, Mangaluru

HARINI J
KRM Special School, Chennai

S. VARSHINI
Blessed Kids Special School, Madurai

BALA SHANMUGAM
The Dolphin Special School, Trichy

HITESH
Aarambh Foundation, Bangalore

Y SANJAI
The Dolphin Special School, Trichy

CHITHARA
Bala Vihar Special School, Chennai

SHANINA BEGUM
Murthuzaviya Special School, Chennai

J JENIFER
Maasa Special School, Chennai

B VIJAI NITHIVANADHAN
Agape Special School, Trichy

PRAM CHARAN
Agape, School for the Special Children, Chennai

KAISKA
Wisdoms Learning Centre
for Special Children, Chennai

MOHAMMED AJISH S
Mitra School for Autism, Palayamkottai

A VIJAY PRABAKARAN
Thendral Vidyalaya Special School, Madurai

DURAI BABU
Bala Vihar Special School, Chennai

HARINI J
KRM Special School, Chennai

ROWEENA ANJALO
KRM Special School, Chennai

RAJESH
Bala Vihar Special School, Chennai



EXTERIOR PRODUCTS

WEATHERBOND PRO



WaterKont:
WaterKontrol, Inc. is a high performance, pure acrylic, elastomeric coating used with other waterproofing materials in water barriers. The product also offers mold protection and helps applications last longer. Forms and finish effectively and easily, keeping waterproofing PRO jobs looking good. Effective waterproofing and infrastructure protection.



WEATHERBOND ADVANCE



ADAPTHERO® ADVANTAGE is an all-weather attraction surface that will protect a riding arena from erosion, rutting and damage, providing fast, dry, firm footing and resulting in faster, safer riding conditions. It provides excellent resistance to fading, discoloration and wear. It has the same VOC content as a top quality paint.



DURAFRESH SOLO



WARM-UP
THERAPEUTIC ACID is a specially formulated performing athletic essential game saving containing UV - protecting ingredients restoring absolute balance of flexibility and skin pickup treatment as low as thermoplastic polymer surface temperature 25 to 30 °C. It improves skin heat and skin pickup recovery to keep your skin fresh for a longer time.



SUMO XTRA



HydroStart
 A.M.C. starts with a specially formulated
 water-based exterior sealer with
 ultraviolet technology, which makes
 the driveway bright and clean.
 It seals, stops salt-related property
 damage, plus exterior walls, exposed
 and beautiful for long.



SUMO XTRA DUST SHIELD



WOODWORKING
MAKING COURT PEOPLE
A specialty furniture store based
entirely around the use of state-of-the-
art technology which ensures that the
color color bright and clean. The
unique water resistant product keeps
the interior walls protected and
beautiful for long. In fact, the
entire furniture provides very good
and durable features. Call
1-800-855-8555



SAMURAI



WILSON'S JUNT
DAVIDSON is a specially formulated water-based acrylic emulsion. Available in white, black, and colors, it is designed for use on a wide variety of surfaces. It is a fast-drying, non-yellowing, and non-flammable. It is available in 1-gal. and 5-gal. pails and offers excellent value and performance.



SHOGUN STAR



HYPOFLUON
GROBLY 0755 is an infrared emulsion paint specially formulated using monodispersed emulsion which provides a high gloss, it is suitable for dry and preferably humid weather conditions. It is based on acrylic emulsions technology that ensures the protection of the external wall from rain and large cracks in addition to the heat loss.

[illegible]

- Natural language processing (NLP) is used to analyze text data
- Examples of NLP applications include sentiment analysis, text classification, and machine translation
- NLP is a key component of many AI systems, including chatbots and recommendation engines

EXTERIOR PRODUCTS

SHOGUN




NIPPON PAINT
SHOGUN is a specially formulated acrylic modified exterior emulsion paint suitable for dry and less humid weather conditions. Its superior ingredients ensure that the exterior wall is protected from algal and fungal attack hence keeping it fresh for long.



SHOGUN EZEE™




NIPPON PAINT
SHOGUN EZEE exterior emulsion is a specially formulated acrylic modified based exterior emulsion paint suitable for exterior dry and moderate humid weather conditions. It provides value for money.



FLOOR GUARD



NIPPON PAINT
FLOOR GUARD is a superior quality paint which is specifically developed to provide a hard, durable adhesion. It acts as an acrylic emulsion coating for cement and paver blocks. It has excellent alkali resistance properties and provides protection against weathering elements.



ROOF EMULSION

ROOF COATING



NIPPON PAINT
ROOF COATING EMULSION is an acrylic paint that is specially formulated for painting and repainting asbestos and roof tiles. It is easy to apply and forms a smooth, tough, durable film with excellent sheen. It is also resistant to fungi, algae, water and dirt.



SUMO XTRA TILE COAT



NIPPON PAINT
SUMO XTRA TILE COAT is an acrylic paint which is specially formulated for painting roof tiles. It is easy to apply and forms a smooth, tough, durable film and provides resistance to dust pick-up.



Base	White, Base 4, Base 5, Base 2, Base 1	Available in six direct shades and base	Available in six direct shades and base	Available in six direct shades and base	Base 100 & semi shades
Colour Range	Please refer the Nippon Paint Exterior	Please refer the Floor Guard Shade Card	Please refer the Floor Guard Shade Card	Please refer the Nippon Paint Exterior Shade Card	Please refer the Nippon Paint Exterior Shade Card
Finish	Smooth matt	Smooth matt	High sheen	Gloss	Semi-gloss
Drying Time	30 minutes	30 minutes	30 minutes	30 minutes	30 minutes
Recoating Interval	4-6 hours	4-6 hours	4-6 hours	4-6 hours	4-6 hours
Coverage	120-125 sq ft/litre (coat) & 50-60 sq ft/litre (2 coats)	50-60 sq ft/litre for 2 coats	40-50 sq ft/litre for 2 coats	100-120 sq ft/litre (coat) & 50-60 sq ft/litre (2 coats)	100-120 sq ft/litre (coat) & 50-60 sq ft/litre (2 coats)
Dilution	50-60% by volume with clean, potable water	50 to 75% by volume with clean, potable water. For dark shades 30% by volume with clean, potable water	Up to 50% by volume with clean, potable water	Ready to use. If necessary, dilute with 5% potable water	Up to 50% by volume with clean, potable water. Stir well before use
Pack Sizes	1L, 4L, 10L & 20L	1L, 4L & 10L	1L, 4L & 10L	1L, 4L, 10L & 20L	1L, 4L, 10L & 20L

*Actual coverage depends on the substrate and time. *Available in special mixtures.

*Water ratio to refer shade card

*Tinted & Customized available

INTERIOR PRODUCTS

KIDZ



NIPPON PAINT
KIDZ is an interior paint specially formulated for children. It has great colour, texture, and technology - clean air due to active carbon technology, safe to touch due to Silver Ion technology, and superior washability due to scratch technology.



SATIN GLO PRIME



NIPPON PAINT
SATIN GLO PRIME is an interior emulsion paint with a pearl effect. It is formulated to resist high abrasion, discoloration, and fading. It is perfect for interior walls, ceilings, and doors. It has a low VOC, ensuring safe and healthy indoor air.



AIRCARE VG



NIPPON PAINT
AIRCARE VG is an interior emulsion paint with a pearl effect. It is formulated to resist high abrasion, discoloration, and fading. It is perfect for interior walls, ceilings, and doors. It has a low VOC, ensuring safe and healthy indoor air.



SATIN GLO+




NIPPON PAINT
SATIN GLO+ is a luxury interior emulsion paint formulated to resist high abrasion, discoloration, and fading. It is perfect for interior walls, ceilings, and doors. It has a low VOC, ensuring safe and healthy indoor air.



SATIN GLO AURA



NIPPON PAINT
SATIN GLO AURA is an interior emulsion paint with a pearl effect. It is formulated to resist high abrasion, discoloration, and fading. It is perfect for interior walls, ceilings, and doors. It has a low VOC, ensuring safe and healthy indoor air.



SPOTLESS NXT



NIPPON PAINT
SPOTLESS NXT is an interior emulsion paint with a pearl effect. It is formulated to resist high abrasion, discoloration, and fading. It is perfect for interior walls, ceilings, and doors. It has a low VOC, ensuring safe and healthy indoor air.



Item	1 litre & 5 litre (2.11 gal & 5.28 gal) 1 coat	1 litre & 5 litre (2.11 gal & 5.28 gal) 1 coat	1 litre & 5 litre (2.11 gal & 5.28 gal) 1 coat	1 litre & 5 litre (2.11 gal & 5.28 gal) 1 coat	1 litre & 5 litre (2.11 gal & 5.28 gal) 1 coat	1 litre & 5 litre (2.11 gal & 5.28 gal) 1 coat
Code Name	KIDZ	SATIN GLO PRIME	AIRCARE VG	SATIN GLO+	SATIN GLO AURA	SPOTLESS NXT
Finish	Emulsion	Emulsion	Emulsion	Emulsion	Emulsion	Emulsion
Coverage	100-120 sq ft per litre (1 coat)	100-120 sq ft per litre (1 coat)	100-120 sq ft per litre (1 coat)	100-120 sq ft per litre (1 coat)	100-120 sq ft per litre (1 coat)	100-120 sq ft per litre (1 coat)
Dry Time	1-2 hours (1 coat)	1-2 hours (1 coat)	1-2 hours (1 coat)	1-2 hours (1 coat)	1-2 hours (1 coat)	1-2 hours (1 coat)
Washable	Yes	Yes	Yes	Yes	Yes	Yes
Low VOC	Yes	Yes	Yes	Yes	Yes	Yes
Scratch Resistant	Yes	Yes	Yes	Yes	Yes	Yes
Warranty	2 years	2 years	5 years	2 years	2 years	2 years
Notes	1. For use on interior walls, ceilings, and doors. 2. For use on interior walls, ceilings, and doors. 3. For use on interior walls, ceilings, and doors. 4. For use on interior walls, ceilings, and doors. 5. For use on interior walls, ceilings, and doors. 6. For use on interior walls, ceilings, and doors. 7. For use on interior walls, ceilings, and doors. 8. For use on interior walls, ceilings, and doors. 9. For use on interior walls, ceilings, and doors. 10. For use on interior walls, ceilings, and doors.	1. For use on interior walls, ceilings, and doors. 2. For use on interior walls, ceilings, and doors. 3. For use on interior walls, ceilings, and doors. 4. For use on interior walls, ceilings, and doors. 5. For use on interior walls, ceilings, and doors. 6. For use on interior walls, ceilings, and doors. 7. For use on interior walls, ceilings, and doors. 8. For use on interior walls, ceilings, and doors. 9. For use on interior walls, ceilings, and doors. 10. For use on interior walls, ceilings, and doors.	1. For use on interior walls, ceilings, and doors. 2. For use on interior walls, ceilings, and doors. 3. For use on interior walls, ceilings, and doors. 4. For use on interior walls, ceilings, and doors. 5. For use on interior walls, ceilings, and doors. 6. For use on interior walls, ceilings, and doors. 7. For use on interior walls, ceilings, and doors. 8. For use on interior walls, ceilings, and doors. 9. For use on interior walls, ceilings, and doors. 10. For use on interior walls, ceilings, and doors.	1. For use on interior walls, ceilings, and doors. 2. For use on interior walls, ceilings, and doors. 3. For use on interior walls, ceilings, and doors. 4. For use on interior walls, ceilings, and doors. 5. For use on interior walls, ceilings, and doors. 6. For use on interior walls, ceilings, and doors. 7. For use on interior walls, ceilings, and doors. 8. For use on interior walls, ceilings, and doors. 9. For use on interior walls, ceilings, and doors. 10. For use on interior walls, ceilings, and doors.	1. For use on interior walls, ceilings, and doors. 2. For use on interior walls, ceilings, and doors. 3. For use on interior walls, ceilings, and doors. 4. For use on interior walls, ceilings, and doors. 5. For use on interior walls, ceilings, and doors. 6. For use on interior walls, ceilings, and doors. 7. For use on interior walls, ceilings, and doors. 8. For use on interior walls, ceilings, and doors. 9. For use on interior walls, ceilings, and doors. 10. For use on interior walls, ceilings, and doors.	1. For use on interior walls, ceilings, and doors. 2. For use on interior walls, ceilings, and doors. 3. For use on interior walls, ceilings, and doors. 4. For use on interior walls, ceilings, and doors. 5. For use on interior walls, ceilings, and doors. 6. For use on interior walls, ceilings, and doors. 7. For use on interior walls, ceilings, and doors. 8. For use on interior walls, ceilings, and doors. 9. For use on interior walls, ceilings, and doors. 10. For use on interior walls, ceilings, and doors.
Price	1.50	1.50	1.50	1.50	1.50	1.50

INTERIOR PRODUCTS

MATEX EZ WASH



NIPPON PAINT
MATEX EZ WASH is an interior emulsion with laboratory grade for better resistance high durability and a long lasting finish. The modified acrylic emulsion has superior staining properties that give the painted surface a longer lasting glossy and rich finish.



MATEX GOLD




NIPPON PAINT
MATEX GOLD is a premium emulsion which provides a smooth finish. Easy to colour wash. It delivers excellent coverage, good washability and has long life, hence maintaining a lasting shine.



BREEZE STAR



NIPPON PAINT
BREEZE STAR is an interior emulsion paint with modified superior organic composition. Easy to wash, stain resistant, ultra smooth & superior finish. Also, it's a dipping coat to your wall, all in one material.



VINILEX




NIPPON PAINT
VINILEX is a specially formulated wall finish. Modified acrylic emulsion provides superior wall for durable, washable and smooth finish. It offers good hiding and leveling.



BREEZE



NIPPON PAINT
BREEZE is an economy brand emulsion. It offers smooth and rich finish.



BREEZE EZEE




NIPPON PAINT
BREEZE EZEE is an economy brand emulsion. It offers smooth and rich finish. It gives a smooth and rich finish and also has a better ability to absorb.



CEILING FRESH



NIPPON PAINT
CEILING FRESH is a specially formulated paint. It has a modified acrylic emulsion with smooth matt finish for interior use. The paint changes colour from pink to white as it dries so that the adjustment is easier to adjust.



Item	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White
Color Range	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White, Beige, Blue, Green, Grey, Red, Yellow, Black	White
Size	1kg, 2kg, 5kg, 10kg, 20kg, 30kg, 40kg, 50kg, 60kg, 70kg, 80kg, 90kg, 100kg	1kg, 2kg, 5kg, 10kg, 20kg, 30kg, 40kg, 50kg, 60kg, 70kg, 80kg, 90kg, 100kg	1kg, 2kg, 5kg, 10kg, 20kg, 30kg, 40kg, 50kg, 60kg, 70kg, 80kg, 90kg, 100kg	1kg, 2kg, 5kg, 10kg, 20kg, 30kg, 40kg, 50kg, 60kg, 70kg, 80kg, 90kg, 100kg	1kg, 2kg, 5kg, 10kg, 20kg, 30kg, 40kg, 50kg, 60kg, 70kg, 80kg, 90kg, 100kg	1kg, 2kg, 5kg, 10kg, 20kg, 30kg, 40kg, 50kg, 60kg, 70kg, 80kg, 90kg, 100kg	1kg, 2kg, 5kg, 10kg, 20kg, 30kg, 40kg, 50kg, 60kg, 70kg, 80kg, 90kg, 100kg
Coverage	120-150 sq. ft./kg (1 coat) 120-150 sq. ft./kg (2 coats)	120-150 sq. ft./kg (1 coat) 120-150 sq. ft./kg (2 coats)	120-150 sq. ft./kg (1 coat) 120-150 sq. ft./kg (2 coats)	120-150 sq. ft./kg (1 coat) 120-150 sq. ft./kg (2 coats)	120-150 sq. ft./kg (1 coat) 120-150 sq. ft./kg (2 coats)	120-150 sq. ft./kg (1 coat) 120-150 sq. ft./kg (2 coats)	120-150 sq. ft./kg (1 coat) 120-150 sq. ft./kg (2 coats)
Dry Time	15 hours (1 coat) 24 hours (2 coats)	15 hours (1 coat) 24 hours (2 coats)	15 hours (1 coat) 24 hours (2 coats)	15 hours (1 coat) 24 hours (2 coats)	15 hours (1 coat) 24 hours (2 coats)	15 hours (1 coat) 24 hours (2 coats)	15 hours (1 coat) 24 hours (2 coats)
Washable	Yes (1 coat) Yes (2 coats)	Yes (1 coat) Yes (2 coats)	Yes (1 coat) Yes (2 coats)	Yes (1 coat) Yes (2 coats)	Yes (1 coat) Yes (2 coats)	Yes (1 coat) Yes (2 coats)	Yes (1 coat) Yes (2 coats)
Color Washability	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)
Stain Resistance	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)	Good (1 coat) Good (2 coats)
Finish	Smooth (1 coat) Smooth (2 coats)	Smooth (1 coat) Smooth (2 coats)	Smooth (1 coat) Smooth (2 coats)	Smooth (1 coat) Smooth (2 coats)	Smooth (1 coat) Smooth (2 coats)	Smooth (1 coat) Smooth (2 coats)	Smooth (1 coat) Smooth (2 coats)
Notes	1. Always use the same brand of paint for the same project. 2. Always use the same brand of paint for the same project. 3. Always use the same brand of paint for the same project. 4. Always use the same brand of paint for the same project. 5. Always use the same brand of paint for the same project. 6. Always use the same brand of paint for the same project. 7. Always use the same brand of paint for the same project. 8. Always use the same brand of paint for the same project. 9. Always use the same brand of paint for the same project. 10. Always use the same brand of paint for the same project.	1. Always use the same brand of paint for the same project. 2. Always use the same brand of paint for the same project. 3. Always use the same brand of paint for the same project. 4. Always use the same brand of paint for the same project. 5. Always use the same brand of paint for the same project. 6. Always use the same brand of paint for the same project. 7. Always use the same brand of paint for the same project. 8. Always use the same brand of paint for the same project. 9. Always use the same brand of paint for the same project. 10. Always use the same brand of paint for the same project.	1. Always use the same brand of paint for the same project. 2. Always use the same brand of paint for the same project. 3. Always use the same brand of paint for the same project. 4. Always use the same brand of paint for the same project. 5. Always use the same brand of paint for the same project. 6. Always use the same brand of paint for the same project. 7. Always use the same brand of paint for the same project. 8. Always use the same brand of paint for the same project. 9. Always use the same brand of paint for the same project. 10. Always use the same brand of paint for the same project.	1. Always use the same brand of paint for the same project. 2. Always use the same brand of paint for the same project. 3. Always use the same brand of paint for the same project. 4. Always use the same brand of paint for the same project. 5. Always use the same brand of paint for the same project. 6. Always use the same brand of paint for the same project. 7. Always use the same brand of paint for the same project. 8. Always use the same brand of paint for the same project. 9. Always use the same brand of paint for the same project. 10. Always use the same brand of paint for the same project.	1. Always use the same brand of paint for the same project. 2. Always use the same brand of paint for the same project. 3. Always use the same brand of paint for the same project. 4. Always use the same brand of paint for the same project. 5. Always use the same brand of paint for the same project. 6. Always use the same brand of paint for the same project. 7. Always use the same brand of paint for the same project. 8. Always use the same brand of paint for the same project. 9. Always use the same brand of paint for the same project. 10. Always use the same brand of paint for the same project.	1. Always use the same brand of paint for the same project. 2. Always use the same brand of paint for the same project. 3. Always use the same brand of paint for the same project. 4. Always use the same brand of paint for the same project. 5. Always use the same brand of paint for the same project. 6. Always use the same brand of paint for the same project. 7. Always use the same brand of paint for the same project. 8. Always use the same brand of paint for the same project. 9. Always use the same brand of paint for the same project. 10. Always use the same brand of paint for the same project.	1. Always use the same brand of paint for the same project. 2. Always use the same brand of paint for the same project. 3. Always use the same brand of paint for the same project. 4. Always use the same brand of paint for the same project. 5. Always use the same brand of paint for the same project. 6. Always use the same brand of paint for the same project. 7. Always use the same brand of paint for the same project. 8. Always use the same brand of paint for the same project. 9. Always use the same brand of paint for the same project. 10. Always use the same brand of paint for the same project.

WOOD & METAL

BODELAC



NIPPON PAINT
BODELAC is a specially blended Maydell® surface enamel. It has an added lead or chrome compound that makes it safe to use on leaded glass, reflecting and is suitable for a wide variety of interior and exterior metal, wood and masonry surfaces.



SATIN ENAMEL



NIPPON PAINT
SATIN ENAMEL is a specially blended enamel paint that protects and beautifies interior, exterior, wood, metal and masonry surfaces. It imparts a rich, pure finish with a satin sheen and forms a film which is tough, machine and long-lasting. It is resistant to alkali, acids and water.



AQUA BODELAC*



NIPPON PAINT
AQUA BODELAC is a lead-based, semi-gloss enamel provides rich satin finish and can be used for walls and masonry surfaces. It is safe, low odour, low VOC with excellent water resistance.



WOOD

CLEARTONE



NIPPON PAINT
CLEAR TONE® is a two-part polyurethane finish which protects the wood and maintains its natural beauty. It comes in gloss and matt finishes for multiple surfaces. It toughens the surface, resists scratches and stains, and the wood still looks like its natural self. The soft and elastic finish property protects the surface from household cleaners. It is resistant to oil, acid and fungal attack.

Available for both interior & exterior



MELAMIC



NIPPON PAINT
MELAMIC is a specially formulated, two-part, semi-gloss wood finish for interiors. Its superior low odour formulation lets you preserve wood and recover from scratches and stains. It's wood enhances its aesthetic.

Available for interiors



WOOD MAGIC



NIPPON PAINT
WOOD MAGIC is a high gloss, single part, semi-gloss wood finish that beautifies and protects wood surfaces. While it enhances the elegant and rich look of natural wood, it also protects furniture for long periods.

Available for both interior & exterior



Series	Series 1, Series 2, Series 3 and Series 4 (Interior)	Series 1, Series 2, Series 3 and Series 4 (Exterior)	Series 5, Interior and Exterior	Series 6	Series 7
Colour Range	Matches with the Nippon Paint Colours	Matches with the Nippon Paint Colours	Matches with the Nippon Paint Colours	100	100
Finish	High gloss	Satin	Semi-gloss	Interior: Gloss and Matt Exterior: Gloss and Matt	Interior: Gloss and Matt Exterior: Gloss
Drying Time	17 hours, 3-4 days	17 hours, 3-4 days	10 hours	40 minutes	30 minutes
Blending Time	1-2 hours	1-2 hours	1-2 hours	1-2 hours	1-2 hours
Coverage	100-120 sq ft per litre (1 coat) 100-140 sq ft per litre (2 coats)	100-140 sq ft per litre (1 coat) 100-140 sq ft per litre (2 coats)	100-120 sq ft per litre (1 coat)	100-120 sq ft per litre (1 coat) 100-140 sq ft per litre (2 coats)	100-120 sq ft per litre (1 coat) 100-140 sq ft per litre (2 coats)
Usage	100-120 sq ft per litre (1 coat) for interior 100-140 sq ft per litre (2 coats)	100-140 sq ft per litre (1 coat) for exterior 100-140 sq ft per litre (2 coats)	100-120 sq ft per litre (1 coat) for interior 100-140 sq ft per litre (2 coats)	100-120 sq ft per litre (1 coat) for interior 100-140 sq ft per litre (2 coats)	100-120 sq ft per litre (1 coat) for interior 100-140 sq ft per litre (2 coats)
Red Code	100-120, 100-140, 100-160, 100-180, 100-200, 100-220, 100-240, 100-260, 100-280, 100-300, 100-320, 100-340, 100-360, 100-380, 100-400, 100-420, 100-440, 100-460, 100-480, 100-500, 100-520, 100-540, 100-560, 100-580, 100-600, 100-620, 100-640, 100-660, 100-680, 100-700, 100-720, 100-740, 100-760, 100-780, 100-800, 100-820, 100-840, 100-860, 100-880, 100-900, 100-920, 100-940, 100-960, 100-980, 100-1000	100-120, 100-140, 100-160, 100-180, 100-200, 100-220, 100-240, 100-260, 100-280, 100-300, 100-320, 100-340, 100-360, 100-380, 100-400, 100-420, 100-440, 100-460, 100-480, 100-500, 100-520, 100-540, 100-560, 100-580, 100-600, 100-620, 100-640, 100-660, 100-680, 100-700, 100-720, 100-740, 100-760, 100-780, 100-800, 100-820, 100-840, 100-860, 100-880, 100-900, 100-920, 100-940, 100-960, 100-980, 100-1000	100-120, 100-140, 100-160, 100-180, 100-200, 100-220, 100-240, 100-260, 100-280, 100-300, 100-320, 100-340, 100-360, 100-380, 100-400, 100-420, 100-440, 100-460, 100-480, 100-500, 100-520, 100-540, 100-560, 100-580, 100-600, 100-620, 100-640, 100-660, 100-680, 100-700, 100-720, 100-740, 100-760, 100-780, 100-800, 100-820, 100-840, 100-860, 100-880, 100-900, 100-920, 100-940, 100-960, 100-980, 100-1000	100-120, 100-140, 100-160, 100-180, 100-200, 100-220, 100-240, 100-260, 100-280, 100-300, 100-320, 100-340, 100-360, 100-380, 100-400, 100-420, 100-440, 100-460, 100-480, 100-500, 100-520, 100-540, 100-560, 100-580, 100-600, 100-620, 100-640, 100-660, 100-680, 100-700, 100-720, 100-740, 100-760, 100-780, 100-800, 100-820, 100-840, 100-860, 100-880, 100-900, 100-920, 100-940, 100-960, 100-980, 100-1000	100-120, 100-140, 100-160, 100-180, 100-200, 100-220, 100-240, 100-260, 100-280, 100-300, 100-320, 100-340, 100-360, 100-380, 100-400, 100-420, 100-440, 100-460, 100-480, 100-500, 100-520, 100-540, 100-560, 100-580, 100-600, 100-620, 100-640, 100-660, 100-680, 100-700, 100-720, 100-740, 100-760, 100-780, 100-800, 100-820, 100-840, 100-860, 100-880, 100-900, 100-920, 100-940, 100-960, 100-980, 100-1000

*Available in selected regions

**Actual coverage is dependent on the substrate condition

PRIMERS / UNDERCOATS

AQUA PRIMER



NIPPON PAINT
AQUA PRIMER for all surfaces can be used on wood, wall and metal surfaces, provides superior bonding and enhances durability of top coat.



MULTI PURPOSE WALL SEALER



NIPPON PAINT
MULTI PURPOSE WALL SEALER is a water-based wall sealer specially formulated to provide excellent adhesion and wall sealing. This product is suitable for both interior and exterior masonry and gypsum surfaces. It bonds well with cement and plastered surfaces, thus enhancing the life of the top coat. It has superior anti-algal and anti-fungal properties.



DR. BOND



NIPPON PAINT
DR. BOND efflorescence resistant sealer is a water-based penetrating sealer for concrete (masonry and lime based) surfaces. The product penetrates below the substrate surface and blocks lime from coming on to the surface.



LATEX INTERIOR PRIMER



NIPPON PAINT
LATEX INTERIOR PRIMER is water-based and is formulated to provide good adhesion to interior masonry and cement surfaces. It has good hiding properties and is easy to apply.



LATEX EXTERIOR PRIMER



NIPPON PAINT
LATEX EXTERIOR PRIMER is water-based and is specially formulated for exterior cement, concrete and plastered surfaces. Its unique formula provides extra protection to the top coat. It is also algal and fungal resistant.



Drying Time	30 minutes	30 minutes	30 minutes	30 minutes	30 minutes
Recoating Interval	4-6 hours	4-6 hours	4-6 hours	4-6 hours	4-6 hours
Coverage	For wood & metal: 150-160 sq ft/litre/coat For wall: 160-200 sq ft/litre/coat	110-140 sq ft/litre/coat	100-120 sq ft/litre/coat	210-230 sq ft/litre/coat	100-110 sq ft/litre/coat
Dilution	100% by volume with clean, potable water for wood & metal surfaces 50% by volume with clean, potable water for masonry surfaces	100% by volume with clean, potable water for exterior 50% by volume with clean, potable water for interior	100% by volume with clean, potable water	50% by volume with clean, potable water	100% by volume with clean, potable water
Pack Size	1L, 4L, 10L & 20L	1L, 4L, 10L & 20L	1L, 4L, 10L & 20L	1L, 4L, 10L & 20L	1L, 4L, 10L & 20L

* Actual coverage is dependent on the substrate condition.

PRIMERS / UNDERCOATS

ATOM 2-IN-1 PRIMER*



NIPPON PAINT
ATOM 2-IN-1 PRIMER is suitable for both interior as well as exterior. It provides good adhesion to concrete substrate and value for money.



MULTI-PURPOSE SOLVENT PRIMER



NIPPON PAINT
MULTI-PURPOSE SOLVENT PRIMER is a solvent-based undercoat for different types of wood, POP, gypsum and cement surfaces.



WOOD PRIMER



NIPPON PAINT
WOOD PRIMER is a alkyd-based undercoat with good adhesion and anti-fungal properties for different wooden surfaces.



RED OXIDE METAL PRIMER



NIPPON PAINT
RED OXIDE METAL PRIMER is a specially formulated undercoat for metal surfaces. It has anti-corrosive properties and provides good adhesion to the top coat.



Drying Time	30 minutes	60-80 minutes	30 minutes	60 minutes
Recoating Interval	4-6 hours	6-7 hours	6-7 hours	6-7 hours
Coverage	Interior: 180-200 sq ft/litre/coat Exterior: 100-110 sq ft/litre/coat	130-160 sq ft/litre/coat	130-160 sq ft/litre/coat	130-160 sq ft/litre/coat
Dilution	Up to 100% by volume with clean, potable water for exterior and Up to 20% by volume with clean, potable water for interior	Up to 10% by volume with mineral turpentine/general purpose thinner	Up to 10% by volume with mineral turpentine/general purpose thinner	Up to 10% by volume with mineral turpentine/general purpose thinner
Pack Sizes	1L, 4L, 10L & 20L Available in select markets only	500ML, 1L, 4L & 20L	500ML, 1L, 4L & 20L	500ML, 1L & 4L

* Actual coverage is dependent on the substrate condition

INTERIOR TEXTURE

2-IN-1 EMULSION

WALLTRON - CONSTRUCTION SOLUTIONS

MOMENTO ELEGANT



1. **Introduction**
 2. **Background**
 3. **Methodology**
 4. **Results**
 5. **Conclusion**
 6. **References**

MOMENTO ENHANCER



WINDY START
WINDWARD SWIMMING AND
GLIDING WITH THE FAMILIAR
OILING MOTION TO BREAK SURF-
FACES. HYPERSTRETCH OF BOTH
HINDS LIFTED IN JUMP (LEFT) &
PULL (RIGHT)

MOMENTO D'AZIONE



IMPROVE YOUR
WOMEN'S LIVING *Admission*
Men's living in a town
that gives you a taste
of the other side of the
coin. It's a place where
you can find a new
way of life. They are
open to letting you
know what's going on
in the world. You'll find
a lot of new friends
and a lot of new
ideas.

ATOM FIBRA



**APPROXIMATE
4000000000**
is a multi-billion dollar
cost, mainly intended for
low-income and micro-credit.
It's a fund for small business
that gets interest
reluctance, change in the
cost line.

ATOM 3-IN-1



HYPERION PAINT
ATON 2-NO multipurpose emulsion is a flat and durable paint which makes it ideal for both interior and exterior surfaces. Following extensive R&D and by drawing on its decorating/painting track, the Hypon paint has been developed for maximum performance with a base of polyurethane and acrylic.

HYDROSHIELD DAMPPROOF



WALLTECH HYDROSHIELD is a new patented moisture coating used for waterproofing basements and walls. It is a clear, non-toxic, water-based product that can be applied to any masonry surface. It is available in two forms: a liquid and a powder. The liquid form is applied with a brush or roller, while the powder form is applied with a dry brush or roller. Both forms create a waterproof barrier that prevents moisture from entering the wall. This is a very effective way to protect your basement and walls from water damage.

HYDROSHIELD DAMPSEAL

[illegible]

HYDROSHIELD SEALER




WALLTECH WIDENETLED
MADE is an energy saving
decorative prime designed for
fresh concrete surfaces or
highly polished surfaces of
stone, effervescent and
available each year.

HYDROSHIELD EMULSION



HYDROLYZABLE LIGNIN: A lignin polymer with a high degree of solubility and a high degree of reactivity, it is used in a variety of applications, including as a wood preservative, a wood adhesive, and a wood preservative.



Case	Case Name / ID	Defendant Name	Location	Case No.	Case Title
Case 1	John Doe / 12345	John Doe	New York	12345	John Doe vs. John Doe
Case 2	Jane Smith / 67890	Jane Smith	California	67890	Jane Smith vs. Jane Smith
Case 3	Bob Johnson / 11111	Bob Johnson	Texas	11111	Bob Johnson vs. Bob Johnson
Case 4	Alice Brown / 22222	Alice Brown	Florida	22222	Alice Brown vs. Alice Brown
Case 5	Charlie White / 33333	Charlie White	Illinois	33333	Charlie White vs. Charlie White
Case 6	Diana Green / 44444	Diana Green	Ohio	44444	Diana Green vs. Diana Green
Case 7	Frank Black / 55555	Frank Black	Michigan	55555	Frank Black vs. Frank Black
Case 8	Grace King / 66666	Grace King	North Carolina	66666	Grace King vs. Grace King
Case 9	Henry Lee / 77777	Henry Lee	South Carolina	77777	Henry Lee vs. Henry Lee
Case 10	Ivy Adams / 88888	Ivy Adams	Georgia	88888	Ivy Adams vs. Ivy Adams
Case 11	Jack Hall / 99999	Jack Hall	Alabama	99999	Jack Hall vs. Jack Hall
Case 12	Karen Young / 00000	Karen Young	Arizona	00000	Karen Young vs. Karen Young

	Insulin (U-100) Injection (U-100)			
Brand Name	Humalog	Humalog	Humalog	Humalog
Generic Name	Insulin	Insulin	Insulin	Insulin
Strength (U/ml)	100 units/ml	100 units/ml	100 units/ml	100 units/ml
Form	U-100 (100 units/ml)	U-100 (100 units/ml)	U-100 (100 units/ml)	U-100 (100 units/ml)
Manufacturer	Novo Nordisk	Novo Nordisk	Novo Nordisk	Novo Nordisk

© 2004 Blackwell Publishing Ltd
Journal of Internal Medicine 255: 103–110

WALLTRON - CONSTRUCTION SOLUTIONS

CRACK FILL PASTE



WALLTRON N-SEAL Crack Fill Paste is composed of a high quality modified epoxide resin, premium primer, carefully selected fillers, fillers and additives for superior use in exterior situations. It is an fast to apply, water proof, easy to use water resistant flexible material for filling cracks in concrete surfaces. It has excellent bonding, durability and excellent appearance.

- Fast form, non sagging
- Flexible
- Economical
- Durable
- Non-sagging
- Bonding
- Durable
- Non-toxic

ENHANCER



WALLTRON Enhancer is a ready-to-use, high solid, high performance primer used for acrylic-coatings. It dries quickly, is easy to apply, and is water resistant.



KLEANWALL



WALLTRON KLEANWALL is a liquid-like solution recommended for highly textured exterior walls.



WALL+



WALLTRON WALL+ is a ready-to-use, high performance, SSP based liquid.



WALLTRON - CONSTRUCTION SOLUTIONS

STYLFIX TILE GROUT



WALLTRON STYLFIX Tile Grout is a cement based, polymer modified grout. It is a single component, grey, sand based, polymer modified grout. It is suitable for filling tiles in residential and commercial.



STYLFIX TA1



WALLTRON STYLFIX TA1 is a single component, grey, sand based, polymer modified grout. It is suitable for filling tiles in residential and commercial.

- Easy of Application
- Superior Durability
- Quick Drying
- Optimal Setting Time
- Superior Adhesion
- Can be used on new as well as old construction floors

STYLFIX TA2



WALLTRON STYLFIX TA2 is a single component, grey, sand based, polymer modified grout. It is suitable for filling tiles in residential and commercial.

- Easy of Application
- Superior Durability
- Quick Drying
- Optimal Setting Time
- Superior Adhesion
- Can be used on new as well as old construction floors and floors

N-SEAL



WALLTRON N-SEAL is a cement based, polymer modified grout. It is suitable for filling tiles in residential and commercial.



FR-PUTTY



WALLTRON FR-PUTTY is an epoxide based, polymer modified grout. It is suitable for filling tiles in residential and commercial.



- It is a general use for most interior and exterior applications.
- It is a general use for most interior and exterior applications.
- It is a general use for most interior and exterior applications.

Where to Use	Where to Use	Where to Use	Where to Use	Where to Use	Where to Use	Where to Use	Where to Use	Where to Use
Drying Time	On new concrete, cure for 7 days	8 hours	8 hours	22 minutes	20 minutes	17 minutes	17 minutes	10 minutes
Recoating Time	Minimum 24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours
Coverage	1kg	1kg	1kg	1kg	1kg	1kg	1kg	1kg
Duration	10-15 years	10-15 years	10-15 years	10-15 years	10-15 years	10-15 years	10-15 years	10-15 years
Net Weight	1kg	1kg	1kg	1kg	1kg	1kg	1kg	1kg

WALLTRON - CONSTRUCTION SOLUTIONS

WP+



NIPPON PAINT
WALLTRON WP+ is specially formulated using selected surface active plasticising agents, chemicals and additives for cement concrete, mortar and plasters. It makes concrete cohesive, prevents segregation and reduces water permeability.

- Better compatibility
- Resists corrosion
- Permeability
- Shrinkage
- Workability
- Compressive strength

HYDROSHIELD DAMPSMART



NIPPON PAINT
WALLTRON HYDROSHIELD DAMPSMART is a specially designed waterproof coating for damp surfaces which when cured forms a tough yet elastic film which covers cracks and blocks water. It is used for patch repair of internal external walls and temporary patch repair of roofs.

- Waterproofing
- Good adhesion
- Crack bridging
- Tintable in pastel shades
- Toughness and elasticity
- User friendly
- Suitable for interior and exterior use

HYDRO BLOCK 2K



NIPPON PAINT
WALLTRON HYDRO BLOCK 2K is a two component cementitious, flexible waterproofing coating. It is composed of best quality portland cement, properly selected and graded aggregates, additives and acrylic polymer as a binder. It is applied to waterproof and protect concrete structures.

- Flexibility
- Waterproof
- Adhesion
- Crack bridging
- Efflorescence resistant
- Anti-carbonation
- Seamless coat
- Application - easy to apply

AQUASIL



NIPPON PAINT
WALLTRON AQUASIL is a water-based, high performance silicone clear waterproofing compound. It has excellent hydrophobicity so it does not allow water to penetrate the surface while giving the product excellent permeability to aid evaporation of blocked moisture from inside.



Where to Use	Waterproofing of concrete and sand-cement mortars used in concrete and plastering	To be applied on interior walls, exterior walls, concrete or plastered surface, terraces, parapet and balconies	Suitable for use on new & old concrete/mortar/plaster surface	Stone, porous substrate or plaster surface
Drying Time	30-600 mins	4-8 hours	4-8 hours	8 hours
Dosage	100ml per 50kg bag of cement	2.0-2.2 sq.mt/kg/2 coats or 4-5 sq.mt/kg per coat	1.5-2.5 sq. ft/kg/2 coats	70-100sq.mt
Dilution	N/A	160 - 180 micron in 2 coats when applied as recommended	(5% slurr (powder) : liquid, by weight 2:1	1:9 with water
Pack Sizes	100ML, 200ML, 1L, 5L, 10L & 20L	1L, 5L, 10L & 20L	5kg & 15kg	200ML, 5L

*Actual coverage is dependent on the substrate condition

MS POLYMER SEALANTS

VT-652 High Performance MS Sealant



A high-performance high modulus, weather-grade, elastomeric based rubber foam, an advanced MS Polymer technology.

- High strength and durable weathering
- Flexible
- Easy to apply, no skin or flashing
- Fluorocarbon - Non-soluble
- Permanent bonding to most substrates

VT-665 Primerless Auto Glass Sealant



A moisture-cured, high modulus MS Polymer (silane terminated) for window bonding applications. It fast dries (cure) and provides excellent adhesion, weathering, and temperature resistance. It is solvent-free and will not shrink, gap, or sag.

VT-630 / VT-630S MS Flooring Adhesive



An application ready, flooring adhesive formulated with polyurea MS Polymer technology. It cures on exposure to atmospheric moisture and forms a flexible, but rigid bond between flooring and wall applications. It is formulated as a moisture and is for adhesive applied by brush or roller or when its elastic characteristics allow the wood floor to expand and contract without affecting the bond. It is formulated to provide a strong bond between the floor and the wall, preventing water from entering the joint. It is also suitable for use as a very low VOC product.

- Moisture Cure
- Water-based - No odor during effect
- Solvent and VOC-free
- Low odor and low VOC
- Fast cure time
- Good strength and adhesion
- Easy to apply
- Non-flammable and non-toxic

VT-632 / VT-632S Artificial Grass Adhesive



A one-component MS Polymer adhesive for bonding artificial grass to concrete or other hard surface substrates. It is a green product, meeting SCADMD VOC laws and is recommended for green buildings. It is formulated as a moisture-cured adhesive, which is for bonding artificial grass to concrete or other hard surface substrates. It is a green product, meeting SCADMD VOC laws and is recommended for green buildings. It is formulated as a moisture-cured adhesive, which is for bonding artificial grass to concrete or other hard surface substrates.

- Water and moisture resistant
- Green product
- Low odor and low VOC
- Fast cure time
- Good strength and adhesion
- Easy to apply
- Non-flammable and non-toxic

ACRYLIC SEALANTS

VT-220 / VT-220S Seal-All-Gaps



An environmentally friendly acrylic sealant for general purpose sealing applications. It is paintable and formulated for sealing gaps and joints where slight movement or vibration are expected.

- Meets LEED v4.0 Green Building
- Material certified
- Flexible
- Removable flexible
- Easy to apply
- Superior green building product

VT-222 All Purpose Gap Sealant



An economical acrylic sealant for general purpose sealing applications. It is paintable and formulated for sealing gaps and joints where slight movement or vibration are expected.

- Meets LEED v4.0 Green Building
- Material certified
- Flexible
- Removable flexible

VT-226 GP Gap Sealant



An economical acrylic sealant for general purpose sealing applications. It is paintable and formulated for sealing gaps and joints where slight movement or vibration are expected.

- Flexible
- Economical
- Removable flexible

VT-223 Ultra Flex Gap Sealant



A premium grade high elastic acrylic sealant for both exterior and interior sealing applications. It is formulated with enhanced UV inhibitors (resistant) and can withstand up to 25% movement.

- Meets LEED v4.0 Green Building
- Material certified
- Meets LEED v4.0 Green Building
- Flexible
- Removable flexible

Applications: VT-652 High Performance MS Sealant is used in high strength bonding in various construction applications and industrial applications, especially applications that will subject to future stresses.

VT-665 Primerless Auto Glass Sealant is used in window bonding applications, suitable for glass bonding in cars and trucks.

VT-630 / VT-630S MS Flooring Adhesive is used in bonding wood floors to concrete, stone, and masonry. It is also used in bonding artificial grass to concrete or other hard surface substrates.

VT-632 / VT-632S Artificial Grass Adhesive is used in bonding artificial grass to concrete or other hard surface substrates.

Applications: VT-220 / VT-220S Seal-All-Gaps is used in general purpose sealing applications, suitable for sealing gaps and joints where slight movement or vibration are expected.

VT-222 All Purpose Gap Sealant is used in general purpose sealing applications, suitable for sealing gaps and joints where slight movement or vibration are expected.

VT-226 GP Gap Sealant is used in general purpose sealing applications, suitable for sealing gaps and joints where slight movement or vibration are expected.

VT-223 Ultra Flex Gap Sealant is used in premium grade high elastic acrylic sealant for both exterior and interior sealing applications, suitable for sealing gaps and joints where slight movement or vibration are expected.

Available Colors	White, Gray & Black	Black	Light Blue	Gray	Available Colors	White	White	White	White
Coverage	220 sq ft	220 sq ft	220 sq ft	220 sq ft	Coverage	450 sq ft (cartridge) or 550 sq ft (cartridge)	450 sq ft	450 sq ft	450 sq ft (cartridge)
Coverage	100 cartridges/carton	20 cartridges/carton	20 cartridges/carton	20 cartridges/carton	Coverage	100 cartridges/carton	20 cartridges/carton	20 cartridges/carton	20 cartridges/carton

CONSTRUCTION / PANEL ADHESIVE SEALANT

VT-236 Tub Surround



A high performance construction adhesive formulated for grout, steam, heat, and water resistance. It has strong initial grab, excellent adhesion, and fast drying working time.

- Safe for most plastics and floors
- Dries clear and water resistant
- Long working time
- Excellent adhesion

VT-236 V-Bond



A high performance construction adhesive specially formulated to bond non-porous substrates such as aluminum, composite panels, GFRP and more. It is also suitable to bond a variety of other common construction materials. It has strong initial grab, excellent adhesion, and will not cure on vertical surfaces.

- Excellent adhesion to:
 - All metal substrates (aluminum)
 - Strong GFRP
 - Smooth metal metal

VT-232 Eco Nails



A low VOC construction adhesive formulated to comply with SCAGMO N/A #1146-2 for strong initial grab on most construction materials, excellent adhesion, and will not cure on vertical surfaces.

- LEED v4.1 EQ credit
- Low Emitting Materials compliant
- Non-drip paste
- Strong initial grab
- Bonds most materials
- Singapore green building product labeling scheme compliant

DUCT SEALANTS

VT-282 Air Duct Sealant



A 100% polymer solvent-based indoor/outdoor air duct sealant for sealing fabricated joints and other types of air ducts. It remains in a thick and flexible adhesive and cures on the joint and seals, thereby effectively blocks the infiltration of gases, dust and other contaminants and the exfiltration of conditioned air. It is able to accommodate minor expansion and contraction, stays flexible and does not crack.

- Fast cure
- Economical
- Excellent workability
- Crack and tear resistant
- Durable resistant
- Minimal shrinkage
- High solid content
- Indoor and outdoor usage

VT-284 High Performance Duct Sealant



A solvent-based indoor/outdoor air duct sealant for sealing fabricated joints and other types of air ducts. When the duct system will be subject to frequent oil or grease contamination, this thick and tough and flexible adhesive will seal on the joint and gaps, thereby effectively blocks the infiltration of gases, dust and other contaminants and the exfiltration of conditioned air. It is used in polluted environments as it can withstand service temperature up to 70°C.

- Fast cure
- Viscous to best mechanical properties
- Excellent workability
- Crack and tear resistant
- Durable resistant
- Minimal shrinkage
- High solid content

VT-286 Water-based Duct Sealant



A water-based indoor/outdoor air duct sealant for sealing fabricated joints and other types of air ducts. It remains in a tough and flexible adhesive and seals on the joint and gaps, thereby effectively blocks the infiltration of gases, dust and other contaminants and the exfiltration of conditioned air. Excellent coverage rate can be achieved with minimum cost application, which helps reduce installation cost.

- Compliant with VOC, ELCA, ATT 2007
- LEED v4.1 EQ credit
- Low emitting materials compliant
- Low VOC and low odour
- Paintable
- Excellent workability
- Crack and tear resistant
- Durable resistant
- High solid content
- Low shrinkage

Applications

Suitable for installation of PVC and ABS tub surrounds ideal for bonding many construction materials, wood, particle board, metal, concrete, fibre-reinforced cement board, ceramic, to the flooring panels.

Suitable for Aluminium Composite Panel (ACP) and metal panel installation. Ideal for bonding most construction materials wood, particle board, metal, concrete, fibre-reinforced cement board, cement, bricks, flooring panels.

Ideal for bonding most construction materials: wood, particle board, masonry, metal, concrete, fibre-reinforced cement board, brick, flooring panels. Shows excellent adhesion for bonding tiled water floor, polymer tile cement floor, steel deck with GFRP, GFRP deck in Precast Concrete Composite Slab/Tee.

Applications

Ideal for sealing fabricated joints and seams of sheet metal air ducts, fabricated duct board, thermal insulation, cover gaps, metal barriers, furnace and coils from air ducts.

Ideal for sealing fabricated joints and seams of sheet metal air ducts, fabricated duct board, thermal insulation, cover gaps, metal barriers, furnace and coils from air ducts.

Ideal for sealing fabricated joints and seams of sheet metal air ducts, fabricated duct board, thermal insulation, cover gaps, metal barriers, furnace and coils from air ducts.

Available Colours	1. Greenish Brown	Brown	Light Brown	Available Colours	NA	NA	NA
Cart Size	200 ml (2oz) / 400 ml	500 ml	1000 ml (2.64 gal) / 2.0 kg (4.4 lb)	Cart Size	4 kg (8.8 lb) / 2.5 kg (5.5 lb)	4 kg (8.8 lb)	4 kg (8.8 lb)
Carton Quantity	24 cartridges (carton)	24 cartridges (carton)	24 cartridges (carton) / 4 kg (8.8 lb) (carton)	Carton Quantity	5 cartridges (carton) / 4 kg (8.8 lb)	4 cartridges (carton) / 4 kg (8.8 lb)	4 cartridges (carton) / 4 kg (8.8 lb)

SILICONE SEALANTS

VT-200 Multi Purpose Sealant



A one-component, high performance industrial grade, 100% acidic, pure silicone sealant formulated for bonding and sealing applications where long term reliability is required.

- FDA 21 CFR Part 175.105 (Food contact safe) compliant
- Industrial grade
- Permanently flexible
- Indoor and outdoor use

VT-201 All Purpose Sealant



A one-component, versatile, 100% pure silicone sealant formulated for bonding and sealing applications where long term reliability is required. It will form a waterproof seal on many common wet and dry building materials.

- Adhesive sealant
- Excellent adhesion to many materials
- Permanent flexibility
- Indoor and outdoor use

VT-202 GP Sealant



A one-component, 100% pure silicone sealant formulated to give a broad range of applications. It will form a waterproof seal on many common wet and dry building materials.

- Versatile sealant
- Durable and flexible
- Indoor and outdoor use

VT-210 / VT-210S High Performance Sealant



A one-component, high performance 100% neutral cure silicone sealant formulated to give excellent adhesion and durability. It has excellent resistance to acids, alkalis, vapours, solvents, temperature extremes etc.

- LEED V4.1 EQ Credit Low-Emitting Materials compliant
- ASTM D130 (Class 30) compliant
- AS/NZS 4220.2.1
- Excellent water and vapour
- FDA 21 CFR Part 175.105 (Food contact safe) compliant
- ISO 9001 (Class 25 mm)
- Excellent weathering resistance
- Permanent flexibility
- Indoor and outdoor use
- Superior joint building avoids leaking where required

SILICONE SEALANTS

VT-211 / VT-211S Weatherproofing Sealant



A one-component, high performance 100% neutral cure silicone sealant. It has excellent resistance to outdoor weathering, variation, temperature extremes etc.

- LEED V4.1 EQ Credit Low-Emitting Materials compliant
- ASTM D130 (Class 30) compliant
- AS/NZS 4220.2.1
- Permanent flexibility
- Indoor and outdoor use
- Stable finish
- Superior joint building avoids leaking where required

VT-212 Sanitary Sealant



A one-component, neutral cure silicone sealant formulated for sanitary applications. It will form a durable and waterproof seal on most common wet and dry building materials.

- ASTM D130 (Class 30) compliant
- ASTM D130 (Class 25) compliant
- FDA 21 CFR Part 175.105 (Food contact safe) compliant
- Permanent flexibility
- Indoor and outdoor use

VT-214 Polycarbonate Sealant



A one-component 100% neutral cure silicone sealant specially formulated for polycarbonate bonding. It bonds well on polycarbonate with an elongation of up to 100% and is suitable for use on most common wet and dry building materials.

- Excellent bonding on polycarbonate
- Permanent flexibility
- No discoloration to polycarbonate
- Indoor and outdoor use

VT-218 / VT-218C Glass & Metal Sealant



A one-component, neutral cure silicone sealant formulated to give excellent adhesion and durability. It has excellent resistance to acids, vapours, solvents, temperature extremes etc.

- ASTM D130 (Class 25) compliant
- Excellent adhesion
- Permanent flexibility
- Excellent weather resistance
- Indoor and outdoor use

Applications

General bonding (glass, aluminium, plastic etc.), outdoor wall sealing, and general bonding (aluminium, stainless steel etc.).

General bonding applications, for outdoor use (glass, aluminium, stainless steel etc.).

General bonding applications, for indoor use (glass, aluminium, stainless steel etc.).

Bonding metal for joints in roofing, gutters and building applications. It can bond to most common building materials (aluminium, steel, galvanized iron, copper, painted surfaces and more building etc.).

Applications

Strong weatherproof seal on most common building materials (aluminium, galvanized steel, painted surfaces, glass, brick, concrete etc.). Widely used to seal external aluminium composite cladding.

Excellent with high humidity bathrooms, showers etc. It will bond to most building materials (aluminium, glass, stainless steel etc.).

Bonding and filling polycarbonate and other plastic sheet materials in roofing applications. It can bond to most common building materials (aluminium, glass, galvanized iron, stainless steel, painted surfaces etc.).

Wide range of glass, metal bonding and other applications including bonding metal to stone & masonry, gutters and other applications. It can bond to most common building materials (aluminium, galvanized steel, painted surfaces, glass, concrete etc.).

Availability/Colour	Clear, White, Black, Grey & Bronze	Clear, White, Black, Grey, Aluminium & Bronze	Clear, White, Black & Grey	Translucent, White, Black, Grey, Aluminium, Dark Grey, Dark Bronze	Available Colours	White, Black, Matt Grey & Matt Bronze	Translucent, White & Beige	Translucent	Translucent, Dark Bronze, White, Black & Grey
Content	300ml	300ml	300ml	300ml cartridge & 500g cartridge	Content	300ml cartridge & 500g cartridge	300ml	300ml	300ml / 300ml & 500ml cartridge
Carton Quantity	24 cartridges/carton	24 cartridges/carton	24 cartridges/carton	24 cartridges/carton, 12 cartridges/carton	Carton Quantity	24 cartridges/carton, 12 cartridges/carton	24 cartridges/carton	24 cartridges/carton	24 cartridges/carton, 12 cartridges/carton

FIRE RATED SEALANTS

**VT-219 Fire Rated
Silicone Sealant**



A single-component, go-grade, fast-cure metal chloride primer formulated to form an extremely low chloride ion concentration, regardless of how much the spreader and trowel burn off, a given area is protected by bond for a period of up to two hours depending on wet surface.

- Freezing up to 4 years (N 1980-4 2006)
- ASTM D779 - Class 57 (sandier)
- Low heat transfer and UV resistance
- Excellent adhesion to most substrates
- Made in USA

VT-629 / VT-629S
Fire Rated Hybrid Sealant



A single-component, moisture-curing, equal parts, in advanced 105 volume, technology that provides improved flexibility, no fire lock-out operations, it is compliant with fire ratings specifications of BS 2576-1:2001.

- 4 hours pre-soaking
- 100% Ethanol
- Good Unmounting
- Portable
- Low temp. storage - cool
- Oil clearing
- Slipping ink-line - not staining on adjacent pictures
- ready-made film - no on location
- Dried film - no chemicals

VT-228 / VT-2285
Fire Retardant Sealant



An activist issued a press statement for the night's joint demonstrations. It alluded to a "a house with 25 EN 236s" and "20th anniversary" of a failure to take action when 21,000 immigrants were excluded.

- Large time gaps
(E.g. 1984-2004)
- Sample frame not stable over time
- Few cases left

VT-288
Fire Rated Duct Sealant



A shy, reticent, vote-based independent in just regard, it prefers to a tough and flexible left wing and edged on the right and means, from the scholarly books the influence of pure fact and later conservatism and the elevation of confidence as it is able to accommodate inner ideology and universal, even flexible and slow bottom.

- Five variable components to LEED v4.1 EQ credit
- LEED v4.1 EQ credit: Low-emitting materials compliant
- Low VOCs and low formaldehyde
- Superior extractability
- CHOC and green registries
- Glue resistant
- Chemical resistant

PU SEALANTS / PU FOAM / PRIMER

VT-2605
LM PU Sealant



A three-component, low modulus polyurethane system formulated for construction joint sealing applications. It is flexible and durable at low temperatures and demonstrates excellent adhesion to a wide variety of substrates. It is formulated with 100% solids, is of the single part type, is easily applied by spray, and is resistant to UV radiation. Uses: polyurethane formulation and behavior are:

- Durable and flexible
- Fast turning
- Portable

VT-655
Auto Glass Sealant



A reactive-based, high modulus polyurethane coating formulated for windows, forming applications. It is clear-like and has excellent resistance against weathering, ammonia, sodium and other alkalis.

- Elongation of the cell
- Fast growing
- Good growth in light
- Requires nitrogen

VT-268 / VT-268GG
PU Foam



W. are components, and polyurethane foam for structural purposes applications in long-lasting, insulating, and soundproofing part of various construction systems.

- Score 1 and 0
- Organism: *Chlamydia*
- Genus: *Chlamydia*
- Species: *Chlamydia*
- Genus: *Chlamydia*
- Species: *Chlamydia*
- Genus: *Chlamydia*
- Species: *Chlamydia*

Adapted from

A large, open-plan, park-like auditorium with a stage located horizontally to 100 m, was designed to accommodate the theatre, studio of cinema and video, building and conceptual pavilion from openings, where a five-story of 10 m height is required by another 4 stories in residential, electrical and plumbing standards like the really opening roof of the hall, using free space.

Figure 1. *Figure 1*

resistant, and where a fire rating of up to 4 hours is required. In most cases, concrete, masonry and masonry block and precast concrete block are also used for coating, joint or rock and irregularities with walls, partitions and floor surfaces.

Indicate items with the following:

movement joint between walls and ceiling joists. Ground floor and first floor perimeter sealing on the used floor are sufficient. It has good adhesion to most construction materials: concrete, block, painted wood, aluminium etc.

Copyright © 2004 John Wiley & Sons, Ltd.

users of safety vests as duct
springs and bolt them
inward, back over your
knees, making another loop
of the duct.

16-22000

Manufactured for retail sale, complete
prepackaged (up cover brick, water
board, aluminum window, ground
rod, etc.). Includes water tank,
new model.

Spencer, K. (1997) *For employees*

Starting application fee is \$400. A high
gpa is required. But is good for your
standing in school and community.

What are the following statements about?

assured gas, heat, millions of dollars' heating systems, and insulating thousands of dollars by use on various construction materials (concrete block, floor panels, metal pipe, wood etc.).

4-Black Cores	White Grey & White Black	White Grey & Red	White Grey & Red	Red	Available Cores	White & Grey	Black	Light Grey
Capacity	300 ml	200 ml (cartridge) 600 ml (cartridge & 20 kg coil)	400 g (cartridge) 400 g (cartridge & 10 kg coil)	4 kg 20 kg & 200 ml (cartridge)	Capacity	600 ml (cartridge)	300 ml (cartridge) & 600 ml (cartridge)	750 ml
Cartridge Quantity	20 cartridges (cartridge)	20 cartridges (cartridge) 20 cartridges (cartridge)	24 cartridges (cartridge) 24 cartridges (cartridge)	4 cartridges (14 kg coil) 24 cartridges (cartridge)	Cartridge Quantity	20 cartridges (cartridge)	20 cartridges (cartridge) 20 cartridges (cartridge)	22 bottles (cartridge)

ADHESIVES

VT-420 Vital Band



A black bituminous compound covered by a reinforce aluminium film. It is a versatile self-adhesive tape for instant flashing applications. It is ready to apply, weatherproof, with outstanding durability and is economical.

- Bituminous Instant Flashing Tape
- Reinforce aluminium film
- Waterproof
- Outstanding Durability
- 50mm (1m, 3m, 10m)
- 75mm, 100mm, 150mm, 300mm (10m)

VT-428 Vital Flash



VitalFlash is a versatile and waterproof dry fix solution that is specially formulated to adhere to the various conditions necessary for roofing applications such as abutment as well as ridge and hip. VitalFlash is also UV resistant due to the colored outer layer, designed to match the common roof colors.

- Bitumen Flashing Tape
- Adheres well to most construction materials
- Simple installation
- Neat finish
- Easy to use
- Economical
- Colour - Maroon & Black

VT 133 Vital Nails



A one-component, high performance, paste-like construction adhesive sealant formulated to bond a variety of common construction materials; it has strong initial grab, superior adhesion and will not slump on vertical surfaces.

- Excellent adhesion
- Strong initial grab
- Bonds most materials
- Does not slump

OTHERS

VT-920, VT-921, VT-922



V-Tack is an over-tacky, reusable putty sealant that provides a safe and clean alternative to pins and tapes for various uses at home, school or office. V-Tack can be completely removed without damaging painted surfaces. By folding and kneading the used adhesive putty, V-Tack becomes sticky again and ready for reuse.

- No nail, pin, tape and tacks
- Clean, safe and easy to apply
- Fast and clean bonding
- Removable and reusable
- Non-toxic

Selleys RP7



RP7 is a multi-purpose lubricating and penetrating spray.

- Displaces water (remove water layer)
- Prevent corrosion
- Loosens rusted parts
- Stop squeaks
- Protect all metal surfaces by providing a protective barrier against corrosive environments, such as moisture (water)
- Suitable for household, automotive, marine, farm, industrial and building use

Applications	It is used for roof repair, sealing around chimney and sealing gutter leaks.	Roof abutment, sealing around chimney and roof ridge.	It is used on board and panels, bonding mirror, wood, skirting and polystyrene.	Applications	NA
Packaging		100mm x 10m 300mm x 10m	NA	Packaging	35gm, 50gm & 75gm
					420ml and 105 ml pack size

PAINTING SOLUTIONS FOR YOUR HOME



EXTERIOR PRODUCTS



2-IN-1 EMULSION

PRODUCT SELECTOR CHART - INTERIOR

PRODUCT	APPLY				FUNCTIONAL BENEFITS												PROOF			
	WALL	CEILING	FLOOR	TRIM	Waterproofing	Stain Resistance	UV Resistance	Anti-Microbial	Anti-Static	Anti-Scratch	Anti-Corrosion	Anti-Fingerprint	Anti-Discoloration	Anti-Discoloration	Anti-Discoloration	Anti-Discoloration	Watermark	Watermark	Watermark	Watermark
KIDZ Kids and Pets	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				
AIRCARE VG Air Care Vinyl Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SATIN GLO Satin Gloss Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MATEX EZ WASH Matex Easy Wash Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SATIN GLO Satin Gloss Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SATIN GLO AURA Satin Gloss Aura Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
GLASS STAR Glass Star Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PROTECT Protect Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MINI Mini Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
VINILEX Vinilex Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DRESE Drese Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



PRODUCT SELECTOR CHART - EXTERIOR

PRODUCT	APPLY				FUNCTIONAL BENEFITS												PROOF			
	WALL	CEILING	FLOOR	TRIM	Waterproofing	Stain Resistance	UV Resistance	Anti-Microbial	Anti-Static	Anti-Scratch	Anti-Corrosion	Anti-Fingerprint	Anti-Discoloration	Anti-Discoloration	Anti-Discoloration	Anti-Discoloration	Watermark	Watermark	Watermark	Watermark
WATERPROOF Waterproof Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WATERPROOF Waterproof Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DURAFRESH Durafresh Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SUMO XTRA Sumo Xtra Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SUMO XTRA Sumo Xtra Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ATOM FIBRA Atom Fibra Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SANUARI Sanuari Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SHOGUN Shogun Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ATOM Atom Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FLOOR GUARD Floor Guard Emulsion	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



NIPPON PAINT (INDIA) PRIVATE LIMITED
DECORATIVES DIVISION • Branch Office Addresses

1. INTRODUCTION

INDIA PRIVATE LIMITED
PLOT No. 44/5, PULLENDI STREET, PULLENDI, K. J. ROAD,
CHANDIGARH-160002, INDIA
Corporate Secretary: Chandigarh-160002
Sri Lanka: India
Sri Lanka: India

DISCUSSION

10000 4th St, Suite 100, Irvine, CA 92618
 Phone: (949) 450-1100, Fax: (949) 450-1101
 Website: www.4mat.com
 Email: info@4mat.com

Accepted

100%
100%
100%
100%
100%
100%
100%
100%
100%
100%

SYNOPSIS: This study investigated the effects of a 12-week, low-intensity, low-impact, and low-impact exercise program on the physical and psychological health of older adults. The program was designed to be safe and effective for older adults with a variety of health conditions. The results of the study showed that the program had a positive effect on the physical and psychological health of the participants. The program was well-received by the participants, and they reported a variety of benefits, including improved physical health, improved psychological health, and improved social health. The program was also found to be cost-effective and feasible for implementation in community settings.

HYPERION INVESTMENT AND PRIVATE LIMITED
 100/119/120, 1st Floor, Hyperion Road,
 Hyperion Towers, Adyar, Chennai
 600 020-875 071

HARROW HUNT INDUSTRY LIMITED
10, 11 & 12, Colindale Avenue
Colindale Avenue Road, Green
Harrow, Middlesex HA1 1JH

NATION'S FARTHEST FROM THE WEST
 Delmar - 400 E. Main St.
 Newburg - 100 N. Main St.
 Newburgh - 100 N. Main St.

© 2004 Blackwell Publishing Ltd
Journal of Internal Medicine 255: 105–112
DOI: 10.1111/j.1365-2796.2003.01811.x

© 2000 by The McGraw-Hill Companies
All rights reserved. Printed in the United States of America.
This book is printed on acid-free paper.

© 2000 Blackwell Science Ltd
 1473-2165/00 \$15.00
 ISSN 1473-2165
 Printed in the United Kingdom
 All rights reserved

HYPOGYNT HOLDINGS PRIVATE LIMITED
 No. 204, 12, Ponnusamy Nallu Road, New
 Central Park, Anna Nagar, Madurai - 625 009

HYPOX (MYS) INDIA PRIVATE LIMITED
No. 263 Manager, 2nd Floor, 1st Stage,
Kumbakonam, P.O. Villupuram - 605 002

HYPOCHLORITE INDIA PRIVATE LIMITED
Solely owned by Mr. N. S. Reddy
2001, K. V. Road, K. V. Road, K. V. Road
K. V. Road, K. V. Road, K. V. Road

NORTH EAST INDIA PRIVATE LIMITED
 WORKING ON HOBBY/LEISURE ROAD
 THE JALPAIGURI CHINA - 726107

LIPSON, PAUL; HALL, ROBERT, JR.
 2010-01-01
 2010-01-01
 2010-01-01

JOHN H. KENNEDY
LIBRARY OF CONGRESS PHOTODUPLICATION SERVICE
510 MAINTENANCE BLDG. 2ND FLOOR
WASHINGTON, DC 20540-4010

[illegible]

second printing by Robert, printed
1591, Dordrecht: Variorum, 1995.

TELEVISION
CORPORATION, INC. AND ASSOCIATES
Selling 100% of its No. 100-FM Channel
Selling 100% of its No. 100-FM Channel

Address:
LIPSON PLAST INDIA PRIVATE LIMITED
PLOT 27 SECTOR 13 Gurgaon, Haryana
Dist. Gurgaon Haryana-122 002

Support Fast Track Private Limited
Suite 1030-2, Highways and Bridges
Development Ltd., Main, Bangalore - 560 01

SUPPLY TRUST FROM PRIVATE LIMITED
 Supplier of 2. Quality
 Trade Name: Quality

LAURENCE, J. M. 1993. *Journal of Fish Biology* 43:111-121.

©1994
WORLDWIDE UNITED
148 West 42nd St. 10th Fl. 10018
New York, NY 10018-0001
By Fax to: 212-695-1100
By Mail to: 148 West 42nd St. 10th Fl. 10018

Support available from the following sources:
 2014-2015: 70% from the Government
 2016-2017: 100% from the Government

[illegible]

JACOBI HUNTINGDON RUSTE UNITED
 200 N. 55TH ST. S. 2ND BLDG.
 S.F. 94103-1428
 TEL: 415-398-1000

SOCIETY

NEW ISLH
LIVING FANTASYLAND PRIVATE LIMITED
C-28, Gopesh Road, Gurgaon, Haryana
CIN: U74140HR2005PTC000001
Call: 0124-2345678 Fax: 0124-2345678

[illegible]

ARROW EAST INDIA PRIVATE LIMITED
C/O. DRS ARROW SINGAPORE PTE. LTD.
100, Robinson Road, Singapore 068912
Tel: 3392 1111, Fax: 3392 1112

FUTURE
LUPIN FARM (INDIA) PRIVATE LIMITED
Cotton & Wheat Milling & Processing, Noida, India
VPO: 201301, India
Tel: +91-11-26111111

University of Maryland, University College
College Park, Maryland, USA
Chadwick, R. J. (1997) *Journal of the Royal Society of Medicine*, 90, 112-113.

1. **NAME:** _____
 2. **DATE:** _____
 3. **TIME:** _____
 4. **LOCATION:** _____
 5. **REASON:** _____
 6. **REMARKS:** _____
 7. **SIGNATURE:** _____
 8. **DATE:** _____
 9. **TIME:** _____
 10. **LOCATION:** _____
 11. **REASON:** _____
 12. **REMARKS:** _____
 13. **SIGNATURE:** _____
 14. **DATE:** _____
 15. **TIME:** _____
 16. **LOCATION:** _____
 17. **REASON:** _____
 18. **REMARKS:** _____
 19. **SIGNATURE:** _____
 20. **DATE:** _____
 21. **TIME:** _____
 22. **LOCATION:** _____
 23. **REASON:** _____
 24. **REMARKS:** _____
 25. **SIGNATURE:** _____
 26. **DATE:** _____
 27. **TIME:** _____
 28. **LOCATION:** _____
 29. **REASON:** _____
 30. **REMARKS:** _____
 31. **SIGNATURE:** _____
 32. **DATE:** _____
 33. **TIME:** _____
 34. **LOCATION:** _____
 35. **REASON:** _____
 36. **REMARKS:** _____
 37. **SIGNATURE:** _____
 38. **DATE:** _____
 39. **TIME:** _____
 40. **LOCATION:** _____
 41. **REASON:** _____
 42. **REMARKS:** _____
 43. **SIGNATURE:** _____
 44. **DATE:** _____
 45. **TIME:** _____
 46. **LOCATION:** _____
 47. **REASON:** _____
 48. **REMARKS:** _____
 49. **SIGNATURE:** _____
 50. **DATE:** _____
 51. **TIME:** _____
 52. **LOCATION:** _____
 53. **REASON:** _____
 54. **REMARKS:** _____
 55. **SIGNATURE:** _____
 56. **DATE:** _____
 57. **TIME:** _____
 58. **LOCATION:** _____
 59. **REASON:** _____
 60. **REMARKS:** _____
 61. **SIGNATURE:** _____
 62. **DATE:** _____
 63. **TIME:** _____
 64. **LOCATION:** _____
 65. **REASON:** _____
 66. **REMARKS:** _____
 67. **SIGNATURE:** _____
 68. **DATE:** _____
 69. **TIME:** _____
 70. **LOCATION:** _____
 71. **REASON:** _____
 72. **REMARKS:** _____
 73. **SIGNATURE:** _____
 74. **DATE:** _____
 75. **TIME:** _____
 76. **LOCATION:** _____
 77. **REASON:** _____
 78. **REMARKS:** _____
 79. **SIGNATURE:** _____
 80. **DATE:** _____
 81. **TIME:** _____
 82. **LOCATION:** _____
 83. **REASON:** _____
 84. **REMARKS:** _____
 85. **SIGNATURE:** _____
 86. **DATE:** _____
 87. **TIME:** _____
 88. **LOCATION:** _____
 89. **REASON:** _____
 90. **REMARKS:** _____
 91. **SIGNATURE:** _____
 92. **DATE:** _____
 93. **TIME:** _____
 94. **LOCATION:** _____
 95. **REASON:** _____
 96. **REMARKS:** _____
 97. **SIGNATURE:** _____
 98. **DATE:** _____
 99. **TIME:** _____
 100. **LOCATION:** _____
 101. **REASON:** _____
 102. **REMARKS:** _____
 103. **SIGNATURE:** _____
 104. **DATE:** _____
 105. **TIME:** _____
 106. **LOCATION:** _____
 107. **REASON:** _____
 108. **REMARKS:** _____
 109. **SIGNATURE:** _____
 110. **DATE:** _____
 111. **TIME:** _____
 112. **LOCATION:** _____
 113. **REASON:** _____
 114. **REMARKS:** _____
 115. **SIGNATURE:** _____
 116. **DATE:** _____
 117. **TIME:** _____
 118. **LOCATION:** _____
 119. **REASON:** _____
 120. **REMARKS:** _____
 121. **SIGNATURE:** _____
 122. **DATE:** _____
 123. **TIME:** _____
 124. **LOCATION:** _____
 125. **REASON:** _____
 126. **REMARKS:** _____
 127. **SIGNATURE:** _____
 128. **DATE:** _____
 129. **TIME:** _____
 130. **LOCATION:** _____
 131. **REASON:** _____
 132. **REMARKS:** _____
 133. **SIGNATURE:** _____
 134. **DATE:** _____
 135. **TIME:** _____
 136. **LOCATION:** _____
 137. **REASON:** _____
 138. **REMARKS:** _____
 139. **SIGNATURE:** _____
 140. **DATE:** _____
 141. **TIME:** _____
 142. **LOCATION:** _____
 143. **REASON:** _____
 144. **REMARKS:** _____
 145. **SIGNATURE:** _____
 146. **DATE:** _____
 147. **TIME:** _____
 148. **LOCATION:** _____
 149. **REASON:** _____
 150. **REMARKS:** _____
 151. **SIGNATURE:** _____
 152. **DATE:** _____
 153. **TIME:** _____
 154. **LOCATION:** _____
 155. **REASON:** _____
 156. **REMARKS:** _____
 157. **SIGNATURE:** _____
 158. **DATE:** _____
 159. **TIME:** _____
 160. **LOCATION:** _____
 161. **REASON:** _____
 162. **REMARKS:** _____
 163. **SIGNATURE:** _____
 164. **DATE:** _____
 165. **TIME:** _____
 166. **LOCATION:** _____
 167. **REASON:** _____
 168. **REMARKS:** _____
 169. **SIGNATURE:** _____
 170. **DATE:** _____
 171. **TIME:** _____
 172. **LOCATION:** _____
 173. **REASON:** _____
 174. **REMARKS:** _____
 175. **SIGNATURE:** _____
 176. **DATE:** _____
 177. **TIME:** _____
 178. **LOCATION:** _____
 179. **REASON:** _____
 180. **REMARKS:** _____
 181. **SIGNATURE:** _____
 182. **DATE:** _____
 183. **TIME:** _____
 184. **LOCATION:** _____
 185. **REASON:** _____
 186. **REMARKS:** _____
 187. **SIGNATURE:** _____
 188. **DATE:** _____
 189. **TIME:** _____
 190. **LOCATION:** _____
 191. **REASON:** _____
 192. **REMARKS:** _____
 193. **SIGNATURE:** _____
 194. **DATE:** _____
 195. **TIME:** _____
 196. **LOCATION:** _____
 197. **REASON:** _____
 198. **REMARKS:** _____
 199. **SIGNATURE:** _____
 200. **DATE:** _____
 201. **TIME:** _____
 202. **LOCATION:** _____
 203. **REASON:** _____
 204. **REMARKS:** _____
 205. **SIGNATURE:** _____
 206. **DATE:** _____
 207. **TIME:** _____
 208. **LOCATION:** _____
 209. **REASON:** _____
 210. **REMARKS:** _____
 211. **SIGNATURE:** _____
 212. **DATE:** _____
 213. **TIME:** _____
 214. **LOCATION:** _____
 215. **REASON:** _____
 216. **REMARKS:** _____
 217. **SIGNATURE:** _____
 218. **DATE:** _____
 219. **TIME:** _____
 220. **LOCATION:** _____
 221. **REASON:** _____
 222. **REMARKS:** _____
 223. **SIGNATURE:** _____
 224. **DATE:** _____
 225. **TIME:** _____
 2

STAD HOLDING
MAYON HITE NOW PRIVATE LIMITED
Should be with same logo
Also should show name of the
company in the logo

Journal Club: *Journal of Clinical Investigation*
 1-11-2014: *Journal of Clinical Investigation*
 1-12-2014: *Journal of Clinical Investigation*

Copyright © 2004 by John Wiley & Sons, Inc.
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without permission in writing from John Wiley & Sons, Inc.

5

© 2004
 THERMATECH INCORPORATED
 10000 15th Avenue, Suite 100
 Littleton, Colorado 80120-1000

[illegible]

MANUFACTURER:
LUBIN FARMER RURAL HOMES LIMITED
CHURCH HILL, DARTMOUTH LEAF,
DART AND DORSET BOROUGH, TQ9 7JG

LYNN FINE VOGEL, PRESIDENT
1400 2011, Berkeley, CA 94704
415/841-1212, ext. 2011

Email: tu@nipponpaint.co.in | SMS NIPPON to 56070

Toll-free: 1800 425 3636 | www.nipponpaint.co.in

